
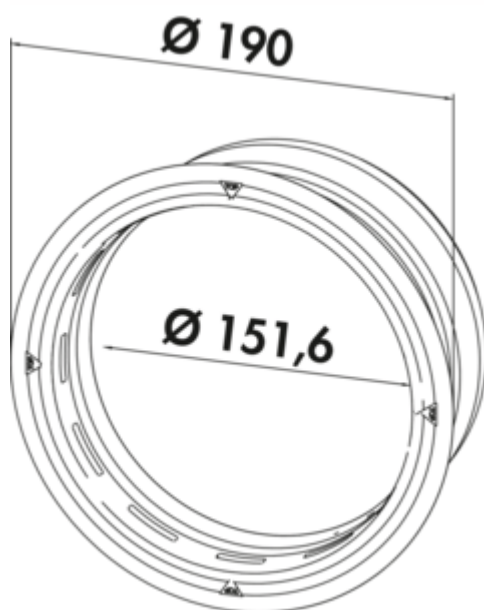


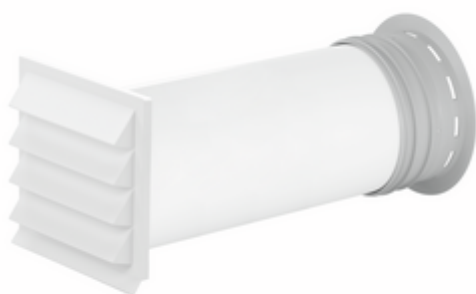

## PRIME flow P-K-Klima-R 150 wall conduct

Product number: 4051068

Configuration: white

### Configuration options

4051068 | white  
 4051070 | anthracite  
 4051074 | brick red  
 4051076 | light grey

✓ Wall sleeve

✓ plug-in system

Wall conduct, with backflow trap — N-Klick system for secure connection with the universal connector

— direct connection of the flat adapter, round pipe or round pipe bends

— max. wall thickness 550 mm, can be shortened to 220 mm

— core hole drilling in nominal Ø 162 or 164 mm

— wall sleeve for tool-free installation and sealing against leakage

[more infos...](#)

### Technical data

|                            |                                                                       |                         |                                        |
|----------------------------|-----------------------------------------------------------------------|-------------------------|----------------------------------------|
| Article type               | Wall sleeve                                                           | Outer diameter          | 190 mm                                 |
| Brand                      | PRIME flow                                                            | Inner diameter          | 151,6 mm                               |
| Material                   | plastic                                                               | Connection diameter     | 150 mm                                 |
| Properties                 | can be shortened                                                      | Suitable wall thickness | max. wall thickness 550 mm             |
| Mounting/Fixing            | plug-in system                                                        | Blind version           | with backpressure shutter              |
| Diameter                   | 150 mm                                                                | System dimension        | 150                                    |
| Suitable for               | direct connection of the flat adapter, round pipe or round pipe bends | Ventilation system      | COMPAIR PRIME flow®                    |
| Shortenability             | can be shortened to 220 mm                                            | Rohbauset               | core hole drilling in nominal Ø 162 mm |
| Field of use & application | Outside                                                               |                         |                                        |

