


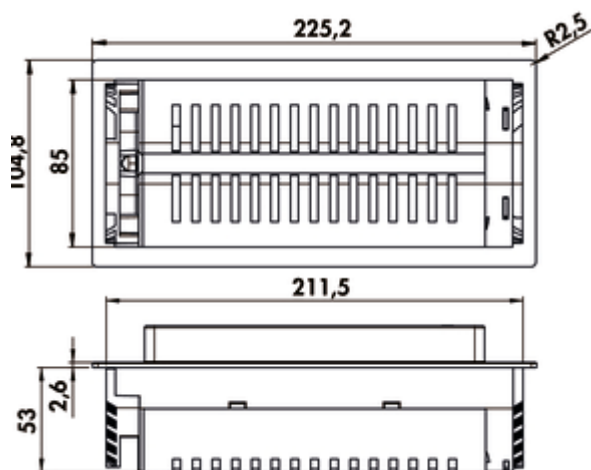

Evoline® BackFlip USB A

Product number: 8031156

Configuration: with Swiss sockets, flush-mount H 2,6 mm, stainless steel

Configuration options

- 8031151 | with earthed plug sockets, flush-mount H 2,6 mm, stainless steel
- 8031154 | with Belgian/French sockets, flush-mount H 2,6 mm, stainless steel
- 8031156 | with Swiss sockets, flush-mount H 2,6 mm, stainless steel
- 8031164 | with earthed plug sockets, flush-mount H 2,6 mm, painted black
- 8031165 | with earthed plug sockets, flush-mount H 5 mm, glass black
- 8031166 | with Swiss sockets, flush-mount H 2,6 mm, painted black
- 8031167 | with Belgian/French sockets, flush-mount H 2,6 mm, painted black
- 8031168 | with Swiss sockets, flush-mount H 5 mm, glass black
- 8031169 | with Belgian/French sockets, flush-mount H 5 mm, glass black

- ✓ Built-in socket element
- ✓ 2 x with Swiss socket
- ✓ angular

Socket element. 2-fold. Rotating with USB A charger (base station).

- installation depth 53 mm
- cut-out dimensions ca. 215 x 88 mm
- 1 x USB charger type A, 5 VDC, IA/I out: 2100 mA
- 2500 mm mains connection line, earthing contact plug enclosed loosely
- flush-mountable
- cable outlet back left



[more infos...](#)

Technical data

Article type	Socket element	Mains plug loosely enclosed	Yes
Width	225,2 mm	Colour bezel	Stainless steel
Cable outlet	cable outlet back left	Colour socket	black
Properties	rotatable	Cover/blind type	Electric
Mounting/Fixing	on the worktop installation	Number of USB ports	1
Material fascia	stainless steel	USB type	USB-A
Certification	CE TÜV	Total charging current	2100 mA (USB-A)
Cut-out dimension	approx. 215 x 88 mm	Type of socket element	Built-in socket element
Shape	angular	Switch type	Touch switch
Length of the supply line (primary)	2.500 mm	Number of sockets (total)	2
Installation depth	53 mm	Opening mechanism	Push-to-open
Version sockets	2 x with Swiss socket	USB version	1 x USB charger type A, 5 VDC, IA/I out: 2100 mA
Flush mountable	Yes, H 2.6 mm		