



VersaLift USB A/C

Product number: 7053266

Configuration: acrylic glass, black


Configuration options

- 7053265 | brushed stainless steel
- 7053266 | acrylic glass, black
- 7053267 | gunmetal
- 7053268 | acrylic glass, white
- 7053296 | with Belgian/French sockets, brushed stainless steel
- 7053297 | with Belgian/French sockets, gunmetal
- 7053298 | with Belgian/French sockets, acrylic glass, black
- 7053299 | with Belgian/French sockets, acrylic glass, white

- ✓ 2 x earthed plug socket
- ✓ round
- ✓ Length of the supply line (primary): 2.000 mm

Socket element. Retractable. With 2 sockets and USB A/C charger for wall cabinets or worktops.

- 3400 watt/16 A, 220–250 VAC, IP54
- double USB charger type A+C, 5 V, 3,0 A
- material plastic, black
- 2000 mm mains connection line, earthing contact plug enclosed loose
- drill Ø ca. 80 mm
- for panel thickness from 16 mm to 60 mm, attachment by screw ring
- cable outlet below
- black and white acrylic glass version with nubs on the surface

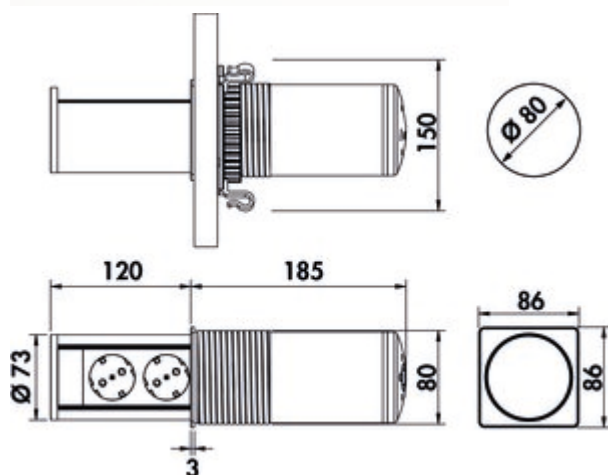

[more infos...](#)

Technical data

Article type	Socket element	Installation depth	185 mm
Drilling diameter	80 mm	Version sockets	2 x earthed plug socket
Width	86 mm	Mains plug loosely enclosed	Yes
Material	plastic	Colour socket	black
Protection class	IP54	Height extended	120 mm
Cable outlet	cable outlet below	Number of USB ports	2
Max. connected load	3400 watt	USB type	USB-A USB-C
Mounting/Fixing	for hanging cabinets in the worktop	Number of sockets (total)	2
Material fascia	Acrylic glass	Worktop thickness	16–60 mm
Certification	CE	Rated insulation voltage AC	250 VAC
Shape	round	USB version	1 x USB charger type A+C, 5 V, 3 A
Length of the supply line (primary)	2.000 mm	Switching current	16 A