



Ideal Standard Ceraflex 3

Product number: 5024165

Configuration: chrome, low pressure

Configuration options

5024164 | chrome, high pressure

5024165 | chrome, low pressure

✓ Sink faucet

✓ low pressure


✓ Swivelling

Single lever faucet. With swivelling outlet and ceramic cartridge.

— swivel range 360°

— drill Ø 35 mm

German
Engineering

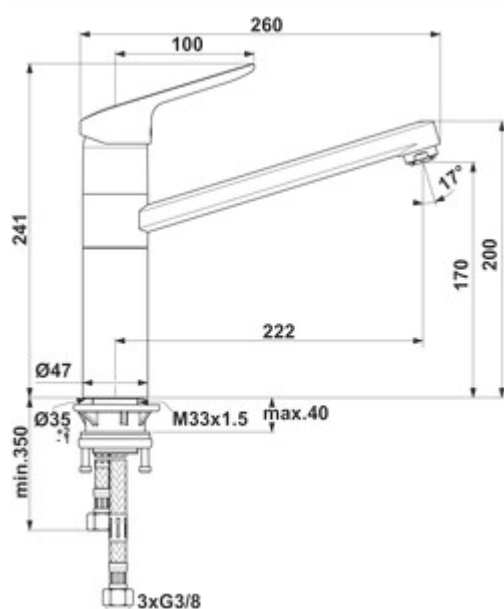

[more infos...](#)

Technical data

Article type	Sink faucet	Cartridge with ceramic sealing discs	Yes
Brand	Ideal Standard	Swivel range outlet	360°
Number of handles	1	Factory customer service	Yes
Total installation height	241 mm	Type of fitting	Single lever faucet
Outreach	222 mm	Operating pressure	low pressure
Outlet	Swivelling	Width	47 mm
Discharge height	171 mm	Material	brass
Operating mode	Lever	Worktop thickness	40 mm
Drilling diameter	35 mm	Number of tap holes	1
Handle position	top	Temperature limiter/scald protection	Yes
Lever length	101 mm	Angle of inclination of aerator	17 °
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Flow rate at 3 bar (cold)	6 l/min

Accessories

5031005	Dirt Filter Ecco 1, 3/8", chrome
---------	----------------------------------