

Varco 1 LED stainless steel coloured

Product number: 7064220

Configuration: single lamp without switch, 3000 K warm white

Configuration options

7064220 | single lamp without switch, 3000 K warm white

- ✓ Under-cabinet/niche light
- ✓ 3000 K warm white
- ✓ 3.6 watts

Lamp mounted from below. Diecast aluminium body, illumination without visible LED points.

Individual lamp without switch or with LED Touch switch and dimmer (w. LED Touch s. d.)

- 3.6 watts, 12 V, **4000 K** neutral white, **3000 K** warm white
- 110 lumen/watt
- dimmer function: brightness continuously dimmable
- 200 mm supply line, 2000 mm connection line with mini-plug-in system
- additional memory function: the last setting is stored for individual lamp with LED Touch switch and dimmer (7064321 o. 7064221)
- **not suitable for switchable sockets**

Set 2, 3, 5 with LED Touch switch and dimmer consisting of:



- 1, 2 or 4 individual lamps without switch (7064320 o. 7064220)
- 1 individual lamp with LED Touch switch and dimmer (7064321 o. 7064221)
- 1 LED converter 1 (7064208)
- may be extended to 5 lamps

This product contains a light source of energy efficiency class E.

Design by Kirstin Overbeck Industrial Design, Münster.



[more infos...](#)

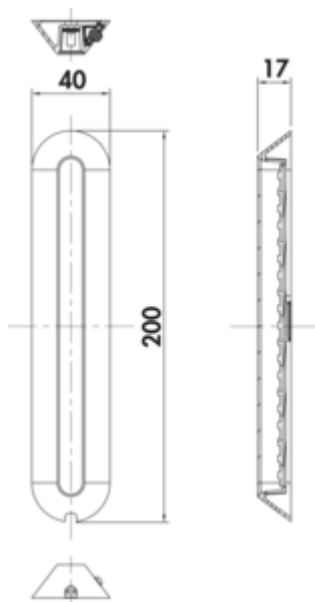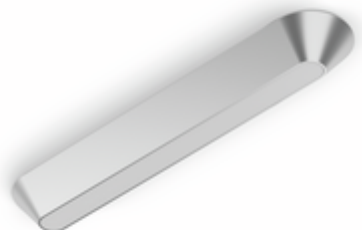

Technical data

Article type	Luminaire	Dimmer	Yes
Height	17 mm	Housing colour	stainless-steel coloured
Width	200 mm	Colour temperature	3000 K warm white
Designer	Design by Kirstin Overbeck Industrial Design, Münster	Colour temperature adjustable	stepless
Energy efficiency class	E	Type of dimming	brightness continuously dimmable
Transformer / converter required	Yes, must be ordered separately	Plug-in system	with mini plug-in system
Mounting/Fixing	Base unit installation (wall unit/ shelf)	Illuminant type	LED
Material housing	Die-cast aluminium	Replaceable illuminant	No
Length of connection cable (secondary)	2.000 mm	Light yield	110 lumen/watt
Switch	No	Homogeneous light field without visible LED points	Yes
Shape	angular	Design	Under-cabinet/niche light
Length of the supply line (primary)	200 mm	Dimming function (composite)	Yes, brightness continuously dimmable
Illuminant included	Yes	Illuminant power	3.6 watts