


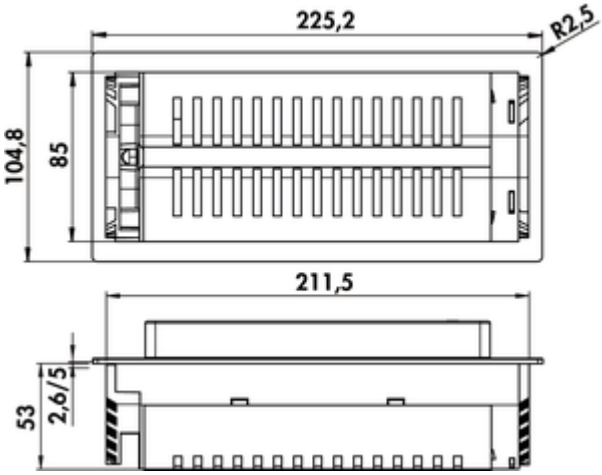

Evoline® BackFlip USB C

Product number: 8031279
Configuration: with earthed plug sockets, flush-mount H 5 mm, glass black matt

Configuration options

8031186 | with earthed plug sockets, stainless steel
8031187 | with earthed plug sockets, painted black
8031188 | with earthed plug sockets, flush-mount H 5 mm, glass black
8031270 | with Belgian/French sockets, flush-mount H 2,6 mm, painted black
8031271 | with Belgian/French sockets, flush-mount H 2,6 mm, stainless steel
8031272 | with Belgian/French sockets, flush-mount H 5 mm, glass black
8031273 | with Swiss sockets, flush-mount H 2,6 mm, stainless steel
8031274 | with Swiss sockets, flush-mount H 2,6 mm, painted black
8031275 | with Swiss sockets, flush-mount H 5 mm, glass black
8031279 | with earthed plug sockets, flush-mount H 5 mm, glass black matt

✓ Built-in socket element
✓ 2 x earthed plug socket
✓ angular

Socket element. 2-fold. Rotating with USB C charger (base station).
— installation depth 53 mm
— cut-out dimensions ca. 215 x 88 mm
— 1 x USB charger type C, 5 VDC, IA/I out: 2100 mA
— 2500 mm mains connection line, earthing contact plug enclosed loosely
— flush-mountable
— cable outlet back left

more infos...

Technical data

Article type	Socket element
Width	225,2 mm
Cable outlet	cable outlet back left
Properties	rotatable
Mounting/Fixing	installation on the worktop
Material fascia	glass
Certification	CE TÜV
Cut-out dimension	approx. 215 x 88 mm
Shape	angular
Length of the supply line (primary)	2.500 mm
Installation depth	53 mm
Version sockets	2 x earthed plug socket

Flush mountable	Yes, H 5 mm
Mains plug loosely enclosed	Yes
Colour bezel	glass black matt
Colour socket	black
Cover/blind type	Electric
Number of USB ports	1
USB type	USB-C
Type of socket element	Built-in socket element
Number of sockets (total)	2
Opening mechanism	Push-to-open
Touch protection ("child safety lock")	with increased contact protection
USB version	1 x USB charger type C, 5 VDC, IA/I out: 2100 mA