


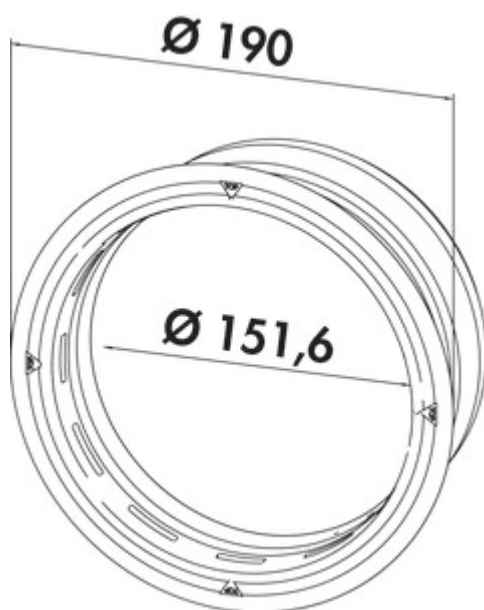

PRIME flow P-E-Jal Col 150 wall conduct incl. THERMOBOX

Product number: 4051066

Configuration: white, stainless steel

Configuration options

4051066 | white, stainless steel

- ✓ Wall sleeve
- ✓ installation in the wall
- ✓ N-click system with integrated latching elements

Wall conduct, incl. THERMOBOX heat retention system and P-E-Jal Col stainless steel external blind for installation close to the ground and for conventional installation at ceiling height.

Two-stage installation:

1. Assembly of the separately packaged construction kit
2. Toolless insertion of the heat retention system and the blind

- N-Klick system for secure connection with the universal connector
- direct connection of the flat adapter, round pipe or round pipe bends
- Blower-Door certified (necessary opening pressure >65 Pa)

Raw construction set:

- raw construction set for installation in the wall at any time
- max. wall thickness 550 mm, can be shortened to 220 mm
- core hole drilling in nominal Ø 162 mm
- polystyrene plugs to protect against dirt during the construction phase
- wall sleeve for tool-free installation and sealing against leakage



[more infos...](#)

Technical data

Article type	Wall sleeve	Consisting of	polystyrene plugs to protect against dirt during the construction phase wall sleeve for tool-free installation and sealing against leakage
Brand	PRIME flow	Connection diameter	150 mm
Material	stainless steel/plastic	Suitable wall thickness	max. wall thickness 550 mm
Properties	can be shortened	Wall box version	wall conduct, incl. THERMOBOX heat retention system and P-E-Jal Col stainless steel external blind for installation close to the ground and for conventional installation at ceiling height
Mounting/Fixing	installation in the wall N-click system with integrated latching elements	System dimension	150
Certification	Blower-Door certified (required opening pressure >65 Pa)	Output drive	round
Suitable for	direct connection of the flat adapter, round pipe or round pipe bends	Ventilation system	COMPAIR PRIME flow®
Shortenability	can be shortened to 220 mm	Opening pressure	> 65 Pa
Shape	round	Rohbauset	raw construction set for installation in the wall at any time max. wall thickness 550 mm, can be shortened to 220 mm core hole drilling in nominal Ø 162 mm polystyrene plugs to protect against dirt during the construction phase wall sleeve for tool-free installation and sealing against leakage

Pok.	Anschl.	Ausz.	Benennung	Artikel-Nr.	Wechselst.
1		1	Rundrohr 150 L500	404309	PVC
2		1	Wandflase	405019	LD-PE
3			Thermoblox 150	404304	PS
4		1	P-E-Jal CoI Aufbaueinheit	4051063	Nichtrostender Stahl (1.4301)

Kundenzeichnung	Zeichnungs-Gruppierung	Material	Maßstab	Datum	Gezeichnet	Geprüft	Freigegeben
			1:1	27.07.23	108		

Ncbar		Compair Prime flow	
P-E-Jal CoI 150 Mauerf. inkl. Thermob.			
4051066			