


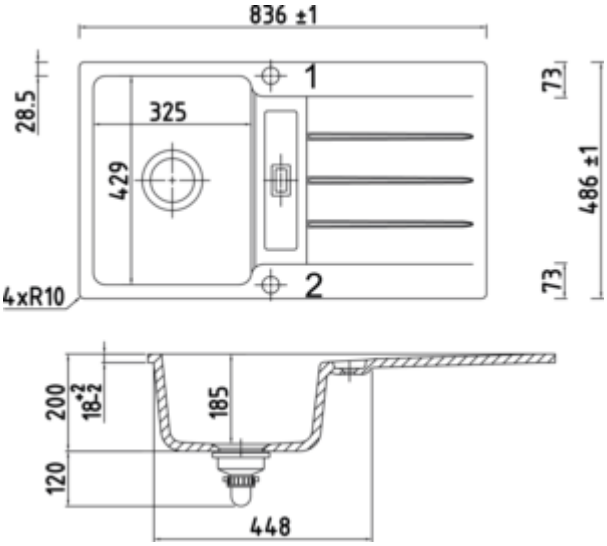

LineUP 1F

Product number: 1091060
Configuration: white matt

Configuration options

1091056 | white glossy
1091057 | slate
1091058 | nero
1091059 | lava
1091060 | white matt

✓ Built-in sink
✓ ceramic
✓ Eccentric set, chrome-plated

Built-in sink for flush mounting. Ceramic, single bowl with draining surface, reversible, 3½" basket strainer valve flush with premium rotational excenter fitting, chromed, drill hole 1 + 2 drilled through.
— requires beading all round or a support bar (beading depth 25 mm, beading width 8 mm)
— cutout dimensions approx. 840 x 490 mm, R 12 mm
— Sink with milled outer rim for flush installation. Worktop thickness min. 30 mm. Attention: In the cutout, a bevel of 2 mm x 45° must be applied to the upper edge!

Design by Hans Winkler Design, Grafenau.



more infos...

Technical data

Article type	Sink
Height	320 mm
Width	836 mm
Material	ceramic
Designer	Design by Hans Winkler Design, Grafenau.
Note	requires beading all round or a support bar (beading depth 25 mm, beading width 8 mm) Sink with milled outer edge for flush mounting. Worktop thickness min. 30 mm. Attention: In the cutout, a chamfer of 2 mm x 45° has to be applied to the upper edge!
Cabinet width	500 mm
Cut-out dimension	approx. 840 x 490 mm, R 12 mm
Surface/coating	matt
Excenter fitting	Eccentric set, chrome-plated
Valve type	3½" basket strainer valve flush
Overflow	Overflow in the drainer
Installation variant	Built-in sink

Main sink width	325 mm
Height main sink	185 mm
Depth main sink	429 mm
Flushing radius (R)	10
Material thickness worktop minimum	30 mm
Number of tap holes	1
Armature bench	Yes
Number of holes	2
Arrangement sinks	Reversible
Number of sinks	1 main sink
Number of overflow points	1
Draining board	With ribbed draining surface
Garnish actuation	Chrome-plated rotary eccentric


Recommendations

1091027	Premium rotational excenter, Accessory, nero
1091036	Premium rotational excenter, Accessory, chrome
1091037	Premium rotational excenter, Accessory, stainless steel

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Dimensional sketch (PDF)

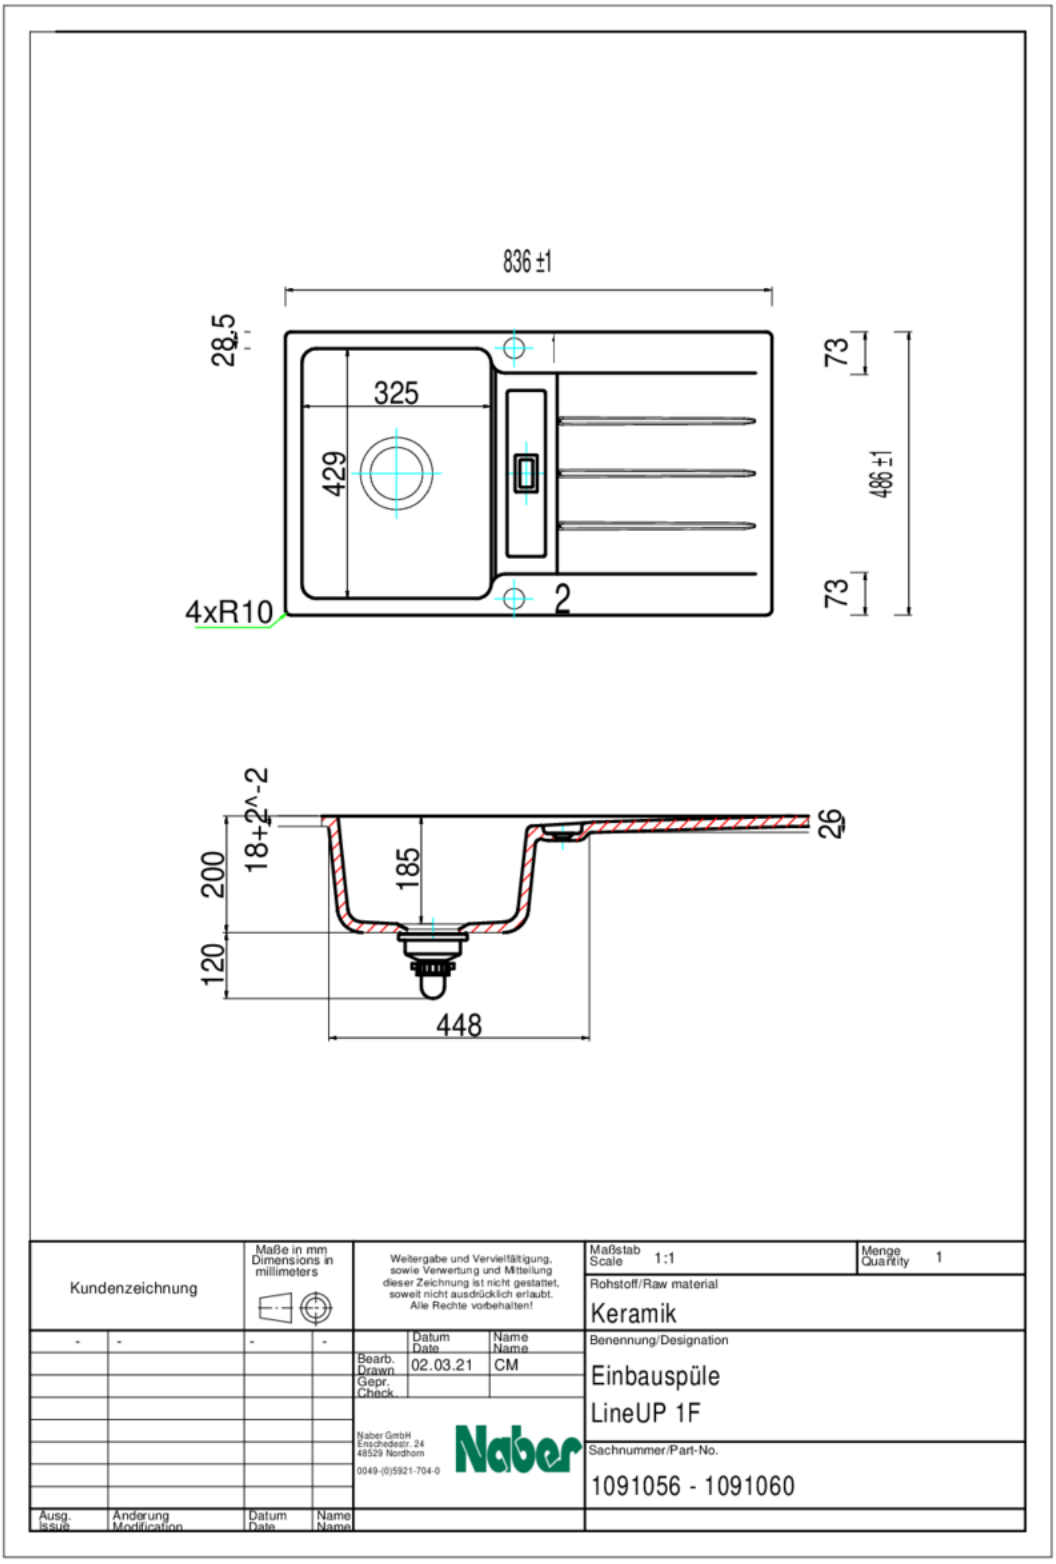

Installation dimensions (PDF)

