


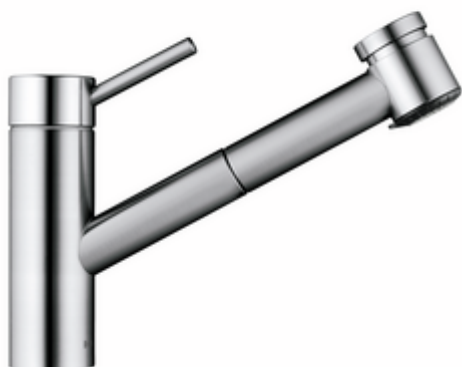

KWC Inox 2

Product number: 5022327

Configuration: stainless steel, high pressure

Configuration options


5022327 | stainless steel, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ Swivelling

Single lever faucet. With swivelling/pull-out hose with shower head (from metal, can be switched to stream or shower) and ceramic cartridge.

— swivel range 130°

— drill Ø 35 mm

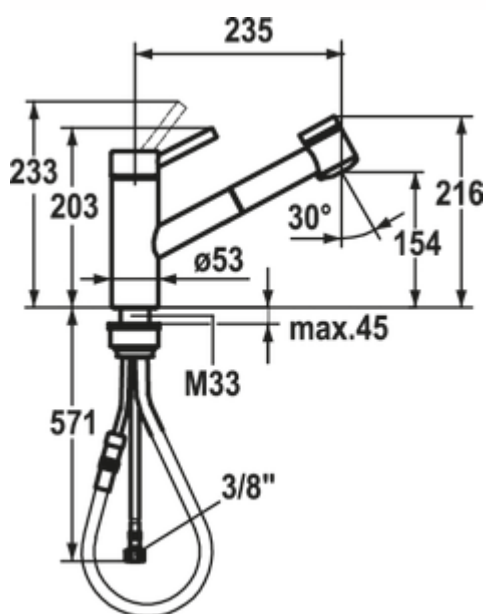

BELGAQUA



[more infos...](#)


Technical data

Article type	Sink faucet	Type of fitting	Single lever faucet
Brand	KWC	Operating pressure	high pressure
Number of handles	1	Width	53 mm
Total installation height	203 mm	Material	stainless steel
Outreach	235 mm	Hose thread	3/8"
Outlet	Swivelling Extractable	Worktop thickness	45 mm
Discharge height	154 mm	TouchProtect	Yes
Operating mode	Lever	Number of tap holes	1
Drilling diameter	35 mm	Temperature limiter/scald protection	Yes
Handle position	top	Convertible jet/shower	Yes
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Spring-guided hose shower	No
Cartridge with ceramic sealing discs	Yes	Angle of inclination of aerator	30 °
Swivel range outlet	130°	Temperature adjustable	Yes
Factory customer service	Yes	Type of hose shower	Integrated hose spray

Dimensional sketch (PDF)

KWC INOX

KWC



KWC-Nr.	Oberfläche
10.271.033.700FL	edelstahl
A 235, flexible Anschlussschläuche	

Küche



Hebelmischer

- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Auszugbrause
 - SprayClean - aktive Kalkbeseitigung und schnelle Siebreinigung
 - bis 700 mm ausziehbar
 - SprayLock - arretierbarer Brausestrahl
 - PowerClean - Siebstrahlmodus, mit Rückstellautomatik
 - Schlauchoberfläche passend zu Armaturoberfläche
- Schlauchdurchführung, schwenkbar 130°
- EasyLock - einfache Auszugbrausenrückführung
- KWC Steuerpatrone L 39 - Universal
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
 - Temperatur- und Mengenbegrenzung
- Flexible Anschlussschläuche 3/8"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm

Auslaufmenge Normalstrahl 12 l/min (3 bar)

Auslaufmenge Siebstrahl 13 l/min (3 bar)

Armaturengeräuschgruppe I

Sortiments-, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 11.01.2021