

KWC Suno 6

Product number: 5022233

Configuration: chrome

Configuration options

5022233 | chrome




- ✓ Sink faucet
- ✓ high pressure
- ✓ Swivelling

Single lever faucet with swivelling/pull-out hose with shower head (can be switched to stream or shower), side lever and ceramic cartridge.

— swivel range 360°

— drill Ø 35 mm

BELGAQUA

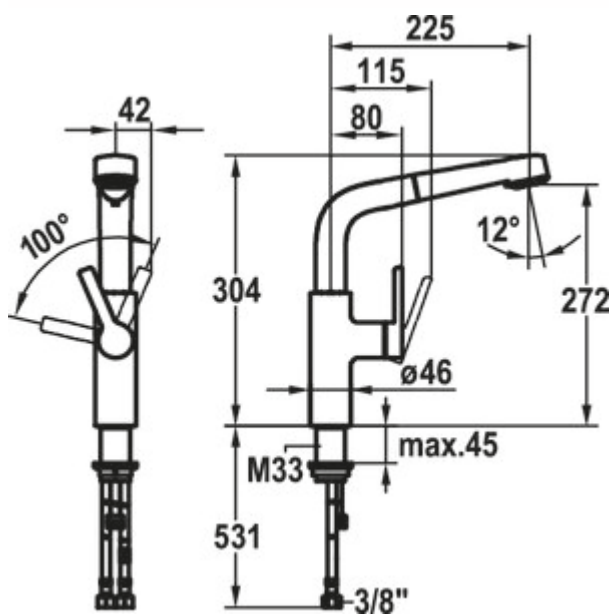


[more infos...](#)

Technical data

Article type	Sink faucet	Width	46 mm
Brand	KWC	Material	brass
Number of handles	1	Hose thread	3/8"
Total installation height	304 mm	Worktop thickness	45 mm
Outreach	225 mm	Swivel range handle	100 °
Outlet	Swivelling Extractable	TouchProtect	Yes
Discharge height	272 mm	Number of tap holes	1
Operating mode	Lever	Temperature limiter/scald protection	Yes
Drilling diameter	35 mm	Convertible jet/shower	Yes
Handle position	right	Spring-guided hose shower	No
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Length shower hose	600 mm
Cartridge with ceramic sealing discs	Yes	Minimum distance wall to centre tap hole	42 mm
Swivel range outlet	360°	Anti-limestone jet regulator	Yes
Factory customer service	Yes	Angle of inclination of aerator	12 °
Type of fitting	Single lever faucet	Temperature adjustable	Yes
Operating pressure	high pressure	Type of hose shower	Integrated hose spray

Dimensional sketch (PDF)

KWC SUNO

KWC


KWC-Nr.	Oberfläche
10.171.003.000FL	ganzchrom
A 225, flexible Anschlusschläuche	

Küche
Hebelmischer

- Positionierung des Hebels nur rechts möglich
 - Sicherheit für Kinder: Kaltwasser bei Hebelposition vorne
- Abstand Wand zu Mitte Tischbohrung min. 42 mm
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Auszugbrause
 - SprayClean - aktive Kalkbeseitigung und schnelle Siebreinigung
 - bis 600 mm ausziehbar
 - PowerClean - Siebstrahlmodus, mit Rückstellautomatik
 - Schlauchoberfläche passend zu Armatoeroberfläche
- Schlauchdurchführung, schwenkbar 360°
- EasyLock - einfache Auszugbrausenrückführung
- OptimalSpace - grosszügiger Wasch- / Arbeitsbereich
- KWC Steuerpatrone S 25
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlusschläuche 3/8"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm

Auslaufmenge Normalstrahl 10 l/min (3 bar)

Auslaufmenge Siebstrahl 10 l/min (3 bar)

Armaturengeräuschgruppe I

Sortiments-, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 08.01.2021