
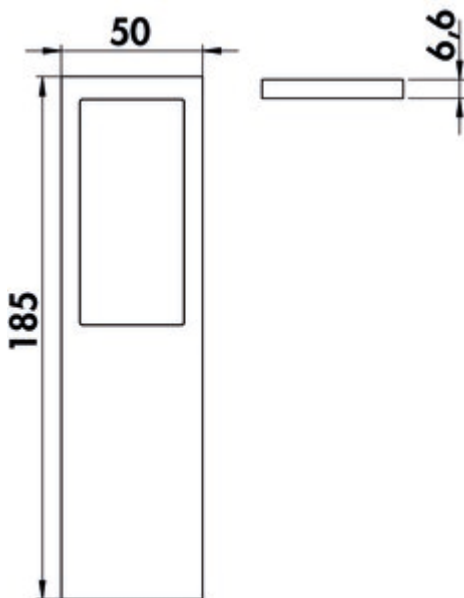


## Livello colour change LED

Product number: 7062320

Configuration: single lamp without switch, LIC/MEC LED system compatible, aluminium coloured



### Configuration options

7062320 | single lamp without switch, LIC/MEC LED system compatible, aluminium coloured

7062321 | single lamp with switch, aluminium coloured

7062322 | set 2, aluminium coloured

7062323 | set 3, aluminium coloured

7062325 | set 5, aluminium coloured

7062330 | single lamp without switch, LIC/MEC LED system compatible, black

7062331 | single lamp with switch, black

7062332 | set 2, black

7062333 | set 3, black

7062335 | set 5, black

- ✓ Under-cabinet/niche light
- ✓ 2700 K warm white to 6500 K cold white
- ✓ 4 watts

Lamp mounted from below. Aluminium body, illumination without visible LED points.

Individual lamp without or with switch

- 4 watts, 12 V
- continuous control of the light colour from 2700 K warm white to 6500 K cold white
- memory function: the last setting is stored
- dimmer function: brightness continuously dimmable
- max. 78 lumen/watt at 6500 K cold white
- 1800 mm supply line with mini-plug-in system

Set 2, 3, 5 with switch consisting of:

- 1, 2 or 4 individual lamps without switch (7062320/7062330)
- 1 individual lamp with switch (7062321/7062331)
- 1 LED converter 20 (7062309)
- may be extended to 5 lamps

This product contains a light source of energy efficiency class F.

More information about the LIC/MEC LED system



[more infos...](#)

## Technical data

Article type	Luminaire	Colour temperature	2700 K warm white to 6500 K cold white
Width	185 mm	Colour temperature adjustable	stepless
Energy efficiency class	F	Type of dimming	brightness continuously dimmable
Transformer / converter required	Yes, must be ordered separately	LIC system compatible	Yes
Mounting/Fixing	Base unit installation (wall unit/shelf)	Plug-in system	with mini plug-in system
Material housing	aluminium	Illuminant type	LED
Switch	No	Replaceable illuminant	No
Shape	angular	Light yield	max. 85 lumen/watt at 6500 K cold white
Memory function	Yes	Homogeneous light field without visible LED points	Yes
Length of the supply line (primary)	1.800 mm	Design	Under-cabinet/niche light
Illuminant included	Yes	Dimming function (composite)	Yes, brightness continuously dimmable
Dimmer	Yes	Illuminant power	4 watts
Housing colour	aluminium coloured		

## Accessories

7061049	LED connection line, Connecting element, white, L 2000 mm
7062309	LED converter 20, grey
7061271	FW function converter, module 2 (radio), 30 W, 6-way distributor
7061273	FW function converter, module 2 (radio), 60 W, 6-way distributor
7061281	FW function converter, module 3 (Bluetooth + radio), 30 W, 6-way distributor
7061283	FW function converter, module 3 (Bluetooth + radio), 60 W, 6-way distributor
7061286	FW function converter, module 2 (radio), 15 W, 4-way distributor
7061287	FW function converter, module 3 (Bluetooth + radio), 15 W, 4-way distributor
7061364	1-channel remote control RGB, white
7061285	1-channel colour change remote control, white
7061276	4 channel colour change remote control, white
7062091	Branco radio remote control, silver
7061403	MEC Driver LED converter, 60/72 W, 12/24 V
7061426	MEC Driver LED 1-channel module radio/ZigBee, Accessory, 12 V
7061428	MEC Driver LED 4-channel module radio/ZigBee, Accessory, 12 V
7061431	MEC Driver LED remote control 1+4 channel ZigBee, white