


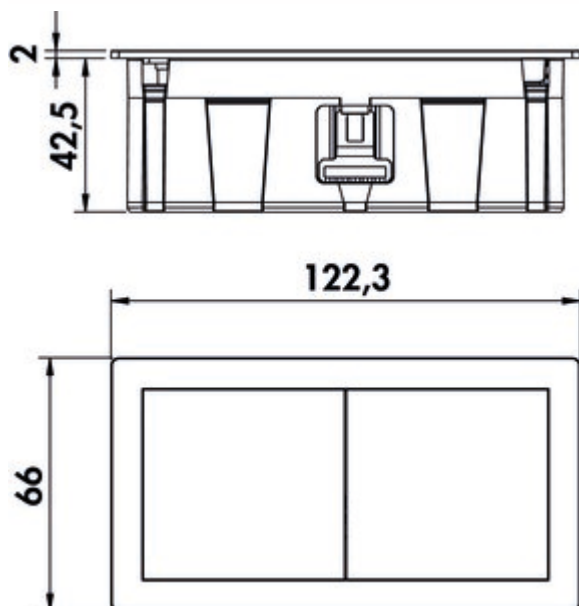

## VersaHit Mono

Product number: 7053288

Configuration: with Belgian/French socket, white matt

### Configuration options

- 7053164 | brushed stainless steel
- 7053165 | black matt
- 7053257 | gunmetal
- 7053258 | white matt
- 7053286 | with Belgian/French socket, brushed stainless steel
- 7053287 | with Belgian/French socket, gunmetal
- 7053288 | with Belgian/French socket, white matt
- 7053289 | with Belgian/French socket, black matt

- ✓ Built-in socket element
- ✓ 1 x with Belgian/French socket
- ✓ angular

Socket element. 1-fold. Built-in socket with sliding cover.

- 3400 watts/16 A, 220–250 VAC, IP54
- 66 x 123 x 40 mm (W x L x D)
- cut-out dimensions approx. 114 x 58 mm, R 4 mm
- 2000 mm mains connection line, earthing contact plug supplied loosely
- very low installation depth (ca. 40 mm)
- increased contact protection



[more infos...](#)

### Technical data

|                     |                                                   |                                        |                                   |
|---------------------|---------------------------------------------------|----------------------------------------|-----------------------------------|
| Article type        | Socket element                                    | Length of the supply line (primary)    | 2.000 mm                          |
| Width               | 122,3 mm                                          | Installation depth                     | 40 mm                             |
| Mains voltage       | 250 VAC                                           | Version sockets                        | 1 x with Belgian/French socket    |
| Protection class    | IP54                                              | Mains plug loosely enclosed            | Yes                               |
| Cable outlet        | cable outlet back                                 | Colour socket                          | black                             |
| Max. connected load | 3400 watt                                         | Cover/blind type                       | Sliding lid                       |
| Mounting/Fixing     | installation on the worktop front panel side wall | Type of socket element                 | Built-in socket element           |
| Certification       | CE                                                | Rated current                          | 16 A                              |
| Cut-out dimension   | approx. 114 x 58 mm, R 4 mm                       | Number of sockets (total)              | 1                                 |
| Shape               | angular                                           | Touch protection ("child safety lock") | with increased contact protection |