

## KWC Era 1

Product number: 5022260

Configuration: stainless steel

### Configuration options


5022260 | stainless steel

- ✓ Sink faucet
- ✓ high pressure
- ✓ Swivelling

Two-hole single lever mixer. With high swivelling outlet and pull-out switchable shower head, separately positionable lever and ceramic cartridge.

— swivelling range can be limited to 150° or 360°

— drill Ø 35 mm

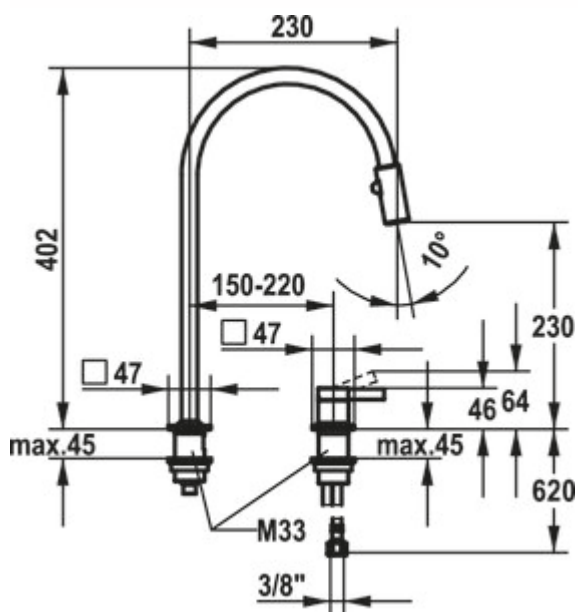

**BELGAQUA**




[more infos...](#)

## Technical data

|                                      |                                                                                    |                                      |                       |
|--------------------------------------|------------------------------------------------------------------------------------|--------------------------------------|-----------------------|
| Article type                         | Sink faucet                                                                        | Operating pressure                   | high pressure         |
| Brand                                | KWC                                                                                | Width                                | 47 mm                 |
| Number of handles                    | 1                                                                                  | Material                             | stainless steel       |
| Total installation height            | 402 mm                                                                             | Hose thread                          | 3/8"                  |
| Outreach                             | 230 mm                                                                             | Worktop thickness                    | 45 mm                 |
| Outlet                               | Swivelling<br>Extractable                                                          | TouchProtect                         | Yes                   |
| Discharge height                     | 230 mm                                                                             | Number of tap holes                  | 2                     |
| Operating mode                       | Lever                                                                              | Temperature limiter/scald protection | Yes                   |
| Drilling diameter                    | 35 mm                                                                              | Convertible jet/shower               | Yes                   |
| Handle position                      | external                                                                           | Moveable aerator                     | Yes                   |
| Manufacturer's warranty              | 5 years manufacturer's warranty<br>10-year after-sales guarantee on<br>spare parts | Spring-guided hose shower            | No                    |
| Cartridge with ceramic sealing discs | Yes                                                                                | Angle of inclination of aerator      | 10 °                  |
| Swivel range outlet                  | can be limited to 150° or 360°                                                     | Temperature adjustable               | Yes                   |
| Factory customer service             | Yes                                                                                | Type of hose shower                  | Integrated hose spray |
| Type of fitting                      | Single lever faucet                                                                |                                      |                       |

## Dimensional sketch (PDF)

## KWC ERA



KWC-Nr. Oberfläche

**10.392.323.700FL** edelstahl

A 230, flexible Anschlussschläuche

## KWC



## Küche

## Hebelmischer

- 2-Loch
- Positionierung des Hebels rechts oder links möglich
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Ausziehbare Umstellbrause 360° drehbar - magnetische formschlüssige Halterung
  - SprayClean - aktive Kalkbeseitigung und schnelle Siebreinigung
  - Strahlregler
  - PowerClean - Siebstrahlmodus, mit Rückstellautomatik
  - bis 500 mm ausziehbar
  - schwarzer Gewebeslauch
- Schlauchdurchführung, schwenkbar 150° oder 360°
- OptimalSpace - grosszügiger Wasch- / Arbeitsbereich
- KWC Steuerpatrone S 25
  - mit Keramikscheibentechnik
  - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlussschläuche 3/8"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm

Auslaufmenge Normalstrahl 7 l/min (3 bar)

Auslaufmenge Siebstrahl 7 l/min (3 bar)

Armaturengeräuschgruppe I

Sortiments, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 08.01.2021