

KWC Eve 4

Product number: 5022161

Configuration: chrome, high pressure

Configuration options

5022161 | chrome, high pressure

5022163 | stainless steel, high pressure


5022171 | black, high pressure

5022172 | white matt, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ Swivelling

Single lever faucet. With swivelling outlet, side lever and ceramic cartridge.

- adjustable shower head fitted seamlessly into the outlet
- TouchProtect – protection against burns through the two-shell principle
- Easy Lock – simple return of the pull-out shower head
- hose surface matches the faucet surface
- lever can be positioned on the right or left
- swivel range 320°
- drill Ø 35 mm

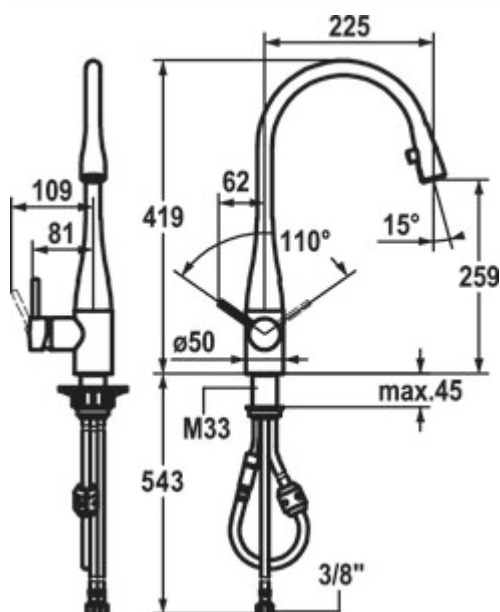

BELGAQUA




[more infos...](#)

Technical data

Article type	Sink faucet	Operating pressure	high pressure
Brand	KWC	Width	50 mm
Number of handles	1	Material	brass
Total installation height	419 mm	Further	Easy Lock – simple return of the pull-out shower head hose surface matches the faucet surface
Outreach	225 mm	Hose thread	3/8"
Outlet	Swivelling	Worktop thickness	45 mm
Discharge height	259 mm	Swivel range handle	110 °
Operating mode	Lever	TouchProtect	Yes
Drilling diameter	35 mm	Number of tap holes	1
Handle position	right	Temperature limiter/scald protection	Yes
Lever length	62 mm	Convertible jet/shower	Yes
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Spring-guided hose shower	No
Cartridge with ceramic sealing discs	Yes	Angle of inclination of aerator	15 °
Swivel range outlet	320°	Temperature adjustable	Yes
Factory customer service	Yes	With mains plug	Yes
Type of fitting	Single lever faucet	Type of hose shower	Integrated hose spray

Dimensional sketch (PDF)

KWC EVE



KWC

DESIGNPREIS
2006
NOMINEEreddot design award
winner 2005product
design
award
2006

KWC-Nr.	Oberfläche
10.111.103.000FL	ganzchrom
A 225, flexible Anschlusschläuche	
10.111.103.700FL	edelstahl
A 225, flexible Anschlusschläuche	

Küche

EDELSTAHL
STAINLESS STEEL

Hebelmischer

- Positionierung des Hebels rechts oder links möglich
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Auszugauslauf verdeckt
 - Neoperl® Caché®
 - bis 600 mm ausziehbar
 - Schlauchoberfläche passend zu Armatoberfläche
- Schlauchdurchführung, schwenkbar 320°
- EasyLock - einfache Auszugbrausenrückführung
- OptimalSpace - grosszügiger Wasch- / Arbeitsbereich
- KWC Steuerpatrone M 35
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlusschläuche 3/8"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm

Auslaufmenge 11 l/min (3 bar)
Armaturengeräuschgruppe I

Sortiments-, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 08.01.2021