

SERVIZIO Namor® 4

Product number: 5025007

Configuration: stainless steel, high pressure

Configuration options

5025007 | stainless steel, high pressure

5025008 | black matt, high pressure

5025045 | gunmetal, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ energy-saving cold start function

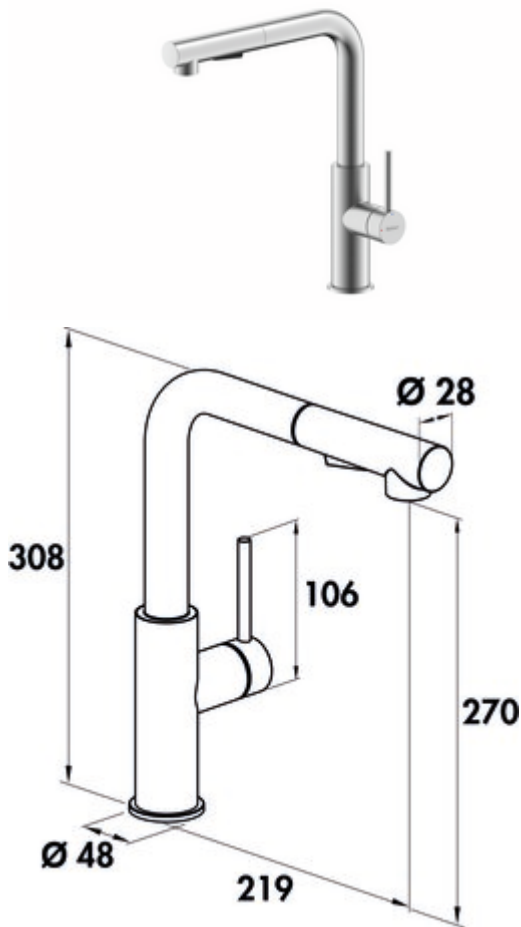
Single lever mixer. With swivelling/pull-out hose with shower head (can be switched to stream or shower), side lever, laminar aerator and ceramic cartridge.

— swivel range 120°

— drill Ø 35 mm

— shower hose: simple click fastening

— corresponds to the German and European drinking water regulation/directive


[more infos...](#)

Technical data

Article type	Sink faucet	Material	stainless steel
Brand	SERVIZIO	Mounting/Fixing	showerhead hose: simple click attachment
Number of handles	1	Cartridge size	25 mm
Total installation height	308 mm	ECO function	energy-saving cold start function
Outreach	219 mm	Convertible jet/shower	Yes
Discharge height	270 mm	Type of hose shower	with swivelling/pull-out hose with shower head (can be switched to stream or shower)
Operating mode	Lever	Max. Flow rate at 3 bar	6,88 l/min
Drilling diameter	35 mm	Flow rate at 3 bar (cold)	6,12 l/min
Handle position	side lever	Flow rate at 3 bar (hot)	6,08 l/min
Lever length	106 mm	Flow rate at 3 bar (mix)	6,88 l/min
Cartridge with ceramic sealing discs	Yes	Flow rate at 3 bar (spray cold)	5,33 l/min
Swivel range outlet	120°	Flow rate at 3 bar (spray hot)	5,4 l/min
Beam type	Laminar beam	Flow rate at 3 bar (spray mix)	5,78 l/min
Type of fitting	Single lever faucet	Size laminar flow regulator	M16,5x1
Operating pressure	high pressure	Connection hoses	700 mm
Width	48 mm	Shower hose version	simple click fastening

