
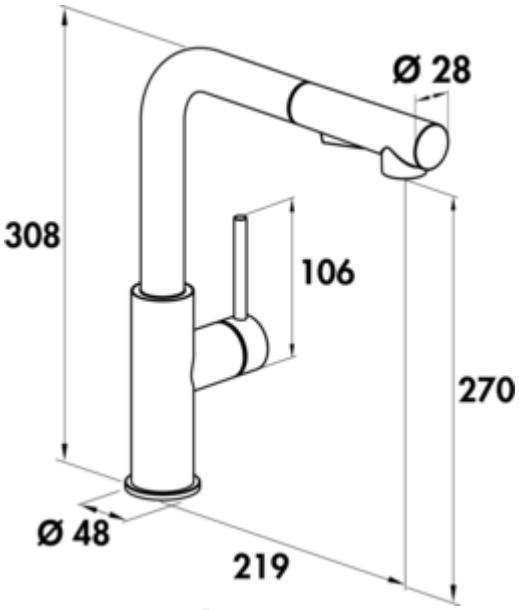


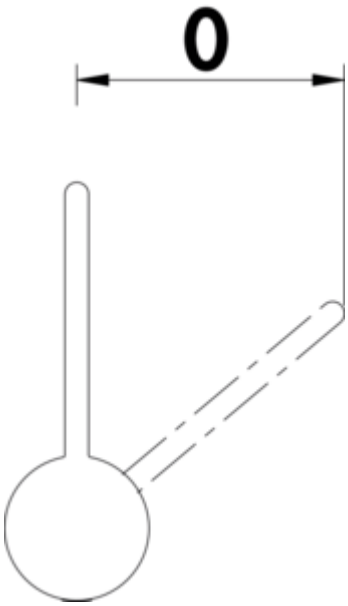


# SERVIZIO Namor® 4

Product number: 5025007
Configuration: stainless steel, high pressure

**Configuration options**
5025007 | stainless steel, high pressure
5025008 | black matt, high pressure
5025045 | gunmetal, high pressure
5025143 | brushed-gold, high pressure
5025144 | rosé-gold, high pressure

✓ Sink faucet
✓ high pressure
✓ energy-saving cold start function

Single lever mixer. With **swivelling/pull-out** hose with shower head (can be switched to stream or shower), side lever, laminar aerator and ceramic cartridge.
— swivel range 120°
— drill Ø 35 mm
— shower hose: simple click fastening
— corresponds to the German and European drinking water regulation/directive

EDELSTAHL® Rost frei

KERAMISCHE DICHTUNG

more infos...

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

## Technical data

| | |
|---|---|
| Article type | Sink faucet |
| Brand | SERVIZIO |
| Number of handles | 1 |
| Total installation height | 308 mm |
| Height | 308 mm |
| Outreach | 219 mm |
| Discharge height | 270 mm |
| Operating mode | Lever |
| Drilling diameter | 35 mm |
| Handle position | side lever |
| Lever length | 106 mm |
| Cartridge with ceramic sealing discs | Yes |
| Swivel range outlet | 120° |
| Beam type | Laminar beam |
| Type of fitting | Single lever faucet |
| Operating pressure | high pressure |
| Width | 48 mm |

| | |
|---|---|
| Material | stainless steel |
| Mounting/Fixing | showerhead hose: simple click attachment |
| Note | corresponds to the German and European drinking water regulation/ directive |
| Cartridge size | 25 mm |
| ECO function | energy-saving cold start function |
| Convertible jet/shower | Yes |
| Type of hose shower | with swivelling/pull-out hose with shower head (can be switched to stream or shower) |
| Max. Flow rate at 3 bar | 6,88 l/min |
| Flow rate at 3 bar (cold) | 6,12 l/min |
| Flow rate at 3 bar (hot) | 6,08 l/min |
| Flow rate at 3 bar (mix) | 6,88 l/min |
| Flow rate at 3 bar (spray cold) | 5,33 l/min |
| Flow rate at 3 bar (spray hot) | 5,4 l/min |
| Flow rate at 3 bar (spray mix) | 5,78 l/min |
| Size laminar flow regulator | M16,5x1 |
| Connection hoses | 700 mm |
| Shower hose version | simple click fastening |

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

## Dimensional sketch (PDF)

