

KWC Eve 2


Product number: 5022165

Configuration: chrome, high pressure

Configuration options

5022165 | chrome, high pressure

5022166 | stainless steel, high pressure

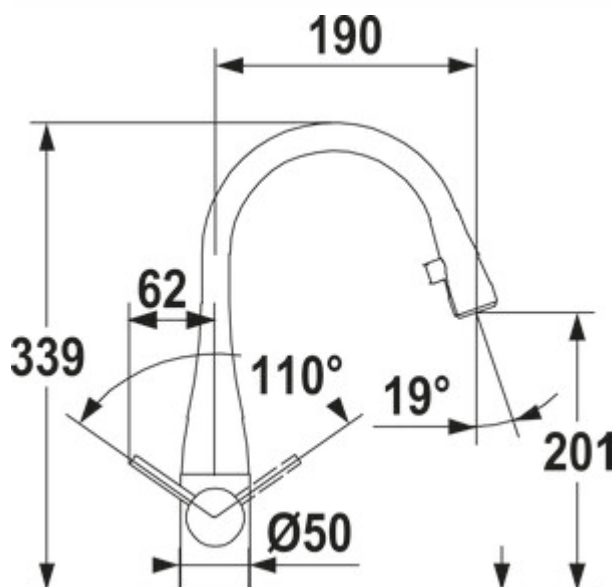

✓ Sink faucet

✓ high pressure

✓ Swivelling

Single lever faucet. With swivelling outlet, side lever and ceramic cartridge.

— adjustable shower head fitted seamlessly into the outlet

— TouchProtect – protection against burns through the two-shell principle

— Easy Lock – simple return of the pull-out shower head

— hose surface matches the faucet surface

— lever can be positioned on the right or left

— swivel range 320°

— drill Ø 35 mm



BELGAQUA




[more infos...](#)

Technical data

Article type	Sink faucet	Width	50 mm
Brand	KWC	Material	brass
Number of handles	1	Mains voltage	100–240 V
Total installation height	339 mm	Further	Easy Lock – simple return of the pull-out shower head hose surface matches the faucet surface
Outreach	190 mm	Hose thread	3/8"
Outlet	Swivelling Extractable	Worktop thickness	45 mm
Discharge height	201 mm	Swivel range handle	110 °
Operating mode	Lever	TouchProtect	Yes
Drilling diameter	35 mm	Number of tap holes	1
Handle position	left or right	Temperature limiter/scald protection	Yes
Lever length	62 mm	Convertible jet/shower	Yes
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Spring-guided hose shower	No
Cartridge with ceramic sealing discs	Yes	Angle of inclination of aerator	19 °
Swivel range outlet	320°	Temperature adjustable	Yes
Factory customer service	Yes	With mains plug	Yes
Type of fitting	Single lever faucet	Type of hose shower	Integrated hose spray
Operating pressure	high pressure		

Dimensional sketch (PDF)

KWC EVE



KWC



KWC-Nr.	Oberfläche
10.111.102.000FL	ganzchrom
A 190, flexible Anschlussschläuche	
10.111.102.700FL	edelstahl
A 190, flexible Anschlussschläuche	

Küche

EDELSTAHL
STAINLESS STEEL

Hebelmischer

- Positionierung des Hebels rechts oder links möglich
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Auszugauslauf verdeckt
 - Neoperl® Caché®
 - bis 600 mm ausziehbar
 - Schlauchoberfläche passend zu Armaturoberfläche
- Schlauchdurchführung, schwenkbar 320°
- EasyLock - einfache Auszugbrausenrückführung
- KWC Steuerpatrone M 35
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlussschläuche 3/8"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm

Auslaufmenge 11 l/min (3 bar)
Armaturengeräuschgruppe I

Sortiments-, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 08.01.2021