

flow Star GTS 125 F wall conduct

Product number: 4033043

Configuration: white, stainless steel


Configuration options

4033043 | white, stainless steel

- ✓ Wall sleeve
- ✓ installation in the wall

With connection to COMPAIR® flow rectangular 125 tube and round **external stainless-steel cover**.

- required opening pressure 100 Pa
- stainless steel cover Ø 197 mm
- tube connector 174 x 82 mm, connector depth 80 mm
- installation depth 314–550 mm, can be shortened to 285 mm, wall penetration Ø about 132 mm
- for the installation of the mounting pipe, a core drilling hole (Ø 132 mm) is recommended

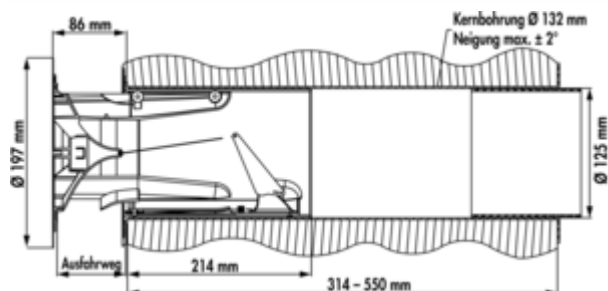

[more infos...](#)

Technical data

Article type	Wall sleeve	Support depth	80 mm
Material	stainless steel	Installation depth	314–550 mm
Properties	can be shortened	Wall box version	with connection to COMPAIR® flow rectangular 125 tube and round external stainless-steel cover
Mounting/Fixing	installation in the wall	Pipe socket dimension	pipe connector 174 x 82 mm
Certification	stainless	System dimension	125
Shortenability	can be shortened to 250 mm	Output drive	angular round
Shape	round	Ventilation system	COMPAIR flow 125
Outer diameter	125 mm	Opening pressure	100 Pa