

## KWC Eve 1


Product number: 5022167

Configuration: chrome, high pressure

### Configuration options

5022167 | chrome, high pressure

5022168 | stainless steel, high pressure

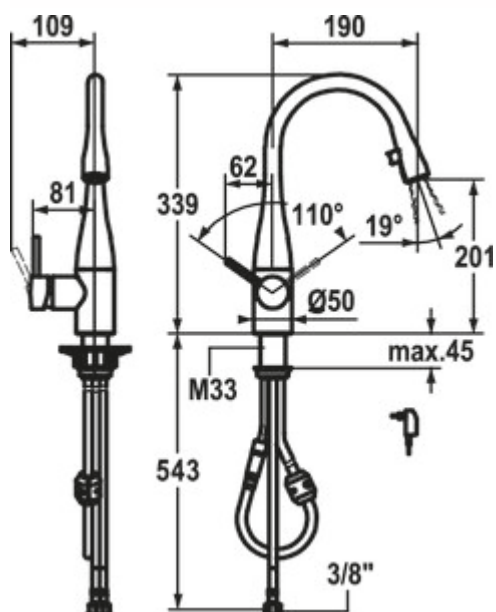

✓ Sink faucet

✓ high pressure

✓ Swivelling

Single lever faucet. With swivelling outlet, side lever and ceramic cartridge.

— LEDs integrated in the shower head illuminate the water jet and create a captivating light sculpture

— At the push of a button, LED-Shine stages a dance of light with the faucet's water jet. After 45 minutes, the light switches off automatically.

— adjustable shower head fitted seamlessly into the outlet

— TouchProtect – protection against burns through the two-shell principle

— Easy Lock – simple return of the pull-out shower head

— hose surface matches the faucet surface

— lever can be positioned on the right or left

— swivel range 320°

— drill Ø 35 mm



**BELGAQUA**




[more infos...](#)

## Technical data

Article type	Sink faucet	Width	50 mm
Brand	KWC	Material	brass
Number of handles	1	Mains voltage	100–240 V
Total installation height	339 mm	Further	LEDs integrated in the shower head illuminate the water jet and create a captivating light sculpture At the push of a button, LED-Shine stages a dance of light with the faucet's water jet. After 45 minutes, the light switches off automatically. Easy Lock – simple return of the pull-out shower head hose surface matches the faucet surface
Outreach	190 mm		
Outlet	Swivelling Extractable		
Discharge height	201 mm		
Operating mode	Lever		
Drilling diameter	35 mm	Hose thread	3/8"
Handle position	left or right	Worktop thickness	45 mm
Lever length	62 mm	Swivel range handle	110 °
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	TouchProtect	Yes
Cartridge with ceramic sealing discs	Yes	Number of tap holes	2
Swivel range outlet	320°	Temperature limiter/scald protection	Yes
Factory customer service	Yes	Convertible jet/shower	Yes
Type of fitting	Single lever faucet	Spring-guided hose shower	No
Operating pressure	high pressure	Angle of inclination of aerator	19 °
		Temperature adjustable	Yes
		With mains plug	Yes
		Type of hose shower	Integrated hose spray

## Dimensional sketch (PDF)

## KWC EVE

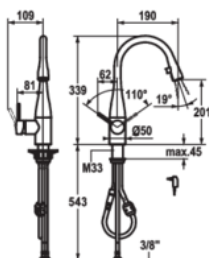

## KWC

DESIGNPREIS  
2006

NOMINEE

reddot design award  
winner 2005product  
design  
award  
2006

KWC-Nr.	Oberfläche
<b>10.121.102.000FL</b>	ganzchrom
A 190, flexible Anschlussschläuche, Netz AP	
<b>10.121.102.700FL</b>	edelstahl
A 190, flexible Anschlussschläuche, Netz AP	

### Küche mit LEDShine

LUMINAQUA®  
Advanced Light TechnologyEDELSTAHL  
STAINLESS STEEL

#### Hebelmischer

- Positionierung des Hebels rechts oder links möglich
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Auszugauslauf verdeckt
  - Neoperl® Caché®
  - integrierter ON/OFF Taster mit Abschaltautomatik nach 45 Minuten
  - bis 600 mm ausziehbar
  - Schlauchoberfläche passend zu Armaturoberfläche
- Schlauchdurchführung, schwenkbar 320°
- EasyLock - einfache Auszugbrausenrückführung
- KWC Steuerpatrone M 35
  - mit Keramikscheibentechnik
  - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlussschläuche ½"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm
- Lieferumfang:
  - Steckernetzteil 100-240 V / Betriebsspannung 6.75 V / Kabellänge 1100 mm

Auslaufmenge 10 l/min (3 bar)  
Armaturengeräuschgruppe I

Sortiments-, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 08.01.2021