

## Lungo LED stainless steel coloured

Product number: 7062360

Configuration: L 450 mm, 6.2 W, 4000 K neutral white

### Configuration options

7062360 | L 450 mm, 6.2 W, 4000 K neutral white

7062361 | L 900 mm, 8.2 W, 4000 K neutral white

7062362 | L 900 mm, 12.5 W, 4000 K neutral white

7062363 | L 1200 mm, 16.8 W, 4000 K neutral white

- ✓ linear light
- ✓ Under-cabinet/niche light
- ✓ 4000 K neutral white

Lamp mounted from below. Slender aluminium profile with glare-free cover.

Individual lamp with LED Touch switch and dimmer

— 24 V, 4000 K neutral white


— 85 lumen/watt

— 2000 mm supply line

— ready for connection to LED converter 2430 (7062250)

— cable outlet rear below side

This product contains a light source of energy efficiency class G.

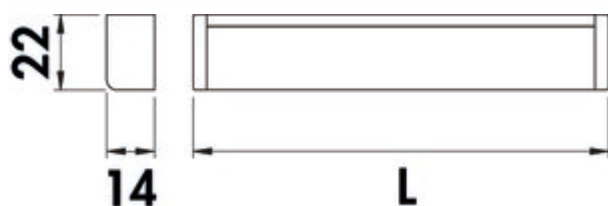

[more infos...](#)

### Technical data

Article type	Luminaire	Illuminant included	Yes
Width	450 mm	Dimmer	Yes
Energy efficiency class	G	Colour temperature	4000 K neutral white
Transformer / converter required	Yes, must be ordered separately	Illuminant type	LED
Protection class	III	Replaceable illuminant	No
Mounting/Fixing	Base unit installation (wall unit/shelf)	Light yield	85 lumen/watt
Material housing	aluminium	Connection	One-sided
Certification	CE	Touch function	Yes
Switch	Yes	Design	linear light Under-cabinet/niche light
Shape	angular	Dimming function (composite)	Yes
Length of the supply line (primary)	2.000 mm	Illuminant power	6.2 watts

### Accessories

7062252	LED connection line 24, Connection line/element, white, L 2000 mm
7062250	LED converter 2430, white
7062251	LED converter 2460, white