

## Wasserwerk Portare 1

Product number: 5021302

Configuration: black matt, high pressure

### Configuration options

5021300 | chrome, high pressure

5021301 | stainless steel coloured, high pressure

5021302 | black matt, high pressure



- ✓ Sink faucet
- ✓ high pressure
- ✓ with swivelling outlet



Single lever faucet. With swivelling outlet, side lever, ceramic cartridge and scald protection.

— energy-saving cold start function

— swivel range 360°

— drill Ø 35 mm

— corresponds to the German and European drinking water regulation/directive

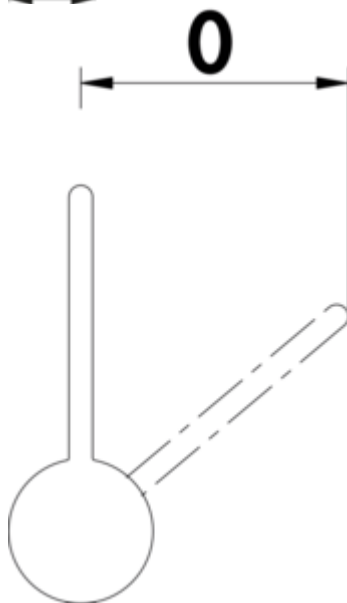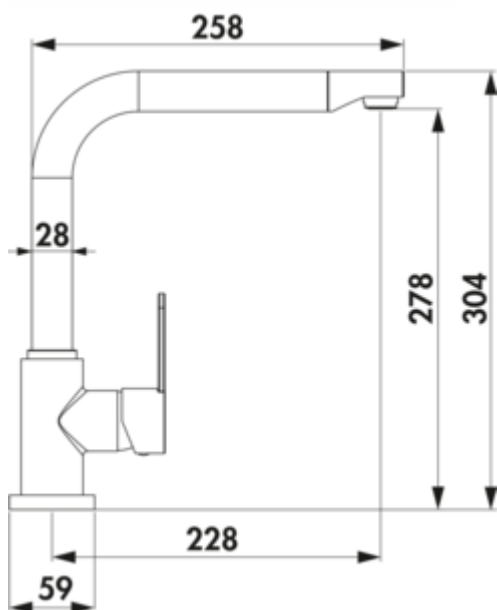

[more infos...](#)

## Technical data

|                                      |                        |  |                                   |
|--------------------------------------|------------------------|--|-----------------------------------|
| Article type                         | Sink faucet            | Type of fitting                          | Single lever faucet               |
| Brand                                | Wasserwerk             | Operating pressure                       | high pressure                     |
| Number of handles                    | 1                      | Width                                    | 59 mm                             |
| Total installation height            | 304 mm                 | Material                                 | brass<br>stainless steel          |
| Height                               | 304 mm                 | Surface/coating                          | powder coated                     |
| Outreach                             | 228 mm                 | Number of tap holes                      | 1                                 |
| Outlet                               | with swivelling outlet | ECO function                             | energy-saving cold start function |
| Discharge height                     | 278 mm                 | Temperature limiter/scald protection     | scald protection                  |
| Operating mode                       | Lever                  | Minimum distance wall to centre tap hole | 0 mm                              |
| Drilling diameter                    | 35 mm                  | Anti-limestone jet regulator             | Yes                               |
| Handle position                      | side lever             | Aerated aerator                          | Yes                               |
| Cartridge with ceramic sealing discs | Yes                    | Max. Flow rate at 3 bar                  | 10,8 l/min                        |
| Swivel range outlet                  | 360°                   |  |                                   |