


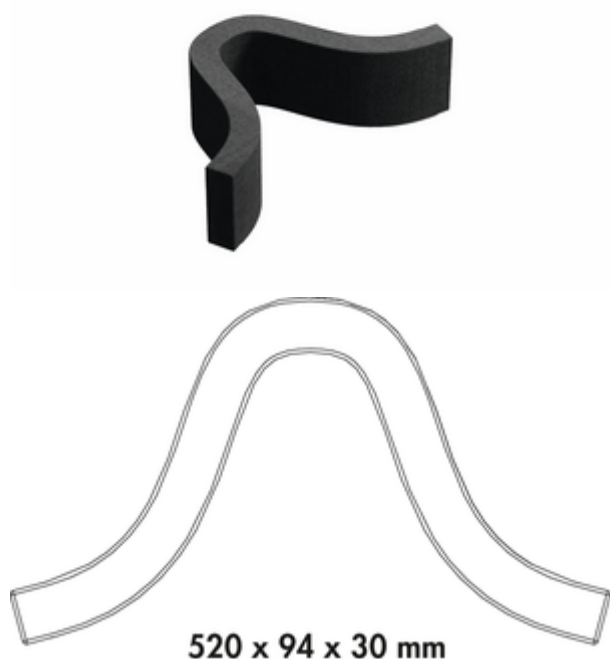

PRIME flow GREENflow OMEGA filter

Product number: 4043080

Configuration: black

Configuration options

4043080 | black

✓ Exhaust air accessorie

Synthetic activated carbon filter in OMEGA design.

— foam filter with activated carbon (3400 +/- 500 g/m² absorber layer)

— hydrophobic (water-repellent)

— regenerable

— easy maintenance/replacement

— special OMEGA design increases the filter area by more than 60 % compared to standard filters

— minimises the pressure losses and the noise of the extractor system

Note:

Depending on the cooking behaviour (intensity and frequency) we recommend to change/regenerate the GREENflow OMEGA filter within a period of 3–6 months. When using multiple filters, the time period multiplies by the number of filters.

[more infos...](#)

Technical data

Article type	Exhaust air accessorie
Brand	PRIME flow
Height	30 mm
Width	520 mm
Properties	hydrophobic (water-repellent) regenerable

Note	Depending on the cooking behaviour (intensity and frequency) we recommend to change/regenerate the GREENflow OMEGA filter within a period of 3–6 months. When using multiple filters, the time period multiplies by the number of filters. easy maintenance/replacement special OMEGA design increases the filter area by more than 60 % compared to standard filters minimises the pressure losses and the noise of the extractor system
------	---

Temperature application range	–40 °C to +100 °C
Pressure loss at 3m/s	15 Pa/m
Filter	foam filter with activated carbon (3400 +/- 500 g/m ² absorber layer)
Ventilation system	COMPAIR PRIME flow®