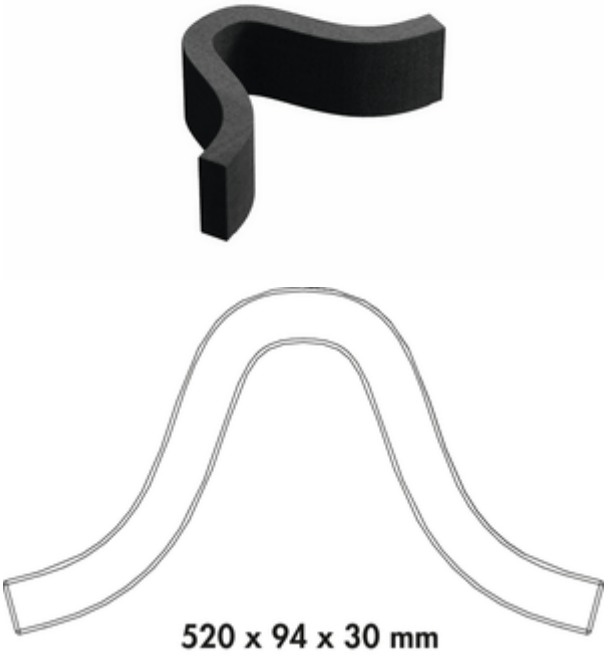


PRIME flow GREENflow OMEGA filter

Product number: 4043080
Configuration: black

Configuration options
4043080 | black

✓ Exhaust air accessorie
Synthetic activated carbon filter in OMEGA design.
— foam filter with activated carbon (3400 +/– 500 g/m² absorber layer)
— hydrophobic (water-repellent)
— regenerable
— easy maintenance/replacement
— special OMEGA design increases the filter area by more than 60 % compared to standard filters
— minimises the pressure losses and the noise of the extractor system

Note:
Depending on the cooking behaviour (intensity and frequency) we recommend to change/regenerate the GREENflow OMEGA filter within a period of 3–6 months. When using multiple filters, the time period multiplies by the number of filters.

more infos...

Technical data

Article type	Exhaust air accessorie
Brand	PRIME flow
Height	30 mm
Width	520 mm
Properties	hydrophobic (water-repellent) regenerable

Note	Depending on the cooking behaviour (intensity and frequency) we recommend to change/regenerate the GREENflow OMEGA filter within a period of 3–6 months. When using multiple filters, the time period multiplies by the number of filters. easy maintenance/replacement special OMEGA design increases the filter area by more than 60 % compared to standard filters minimises the pressure losses and the noise of the extractor system
Temperature application range	–40 °C to +100 °C
Pressure loss at 3m/s	15 Pa/m
Filter	foam filter with activated carbon (3400 +/– 500 g/m² absorber layer)
Ventilation system	COMPAIR PRIME flow®