
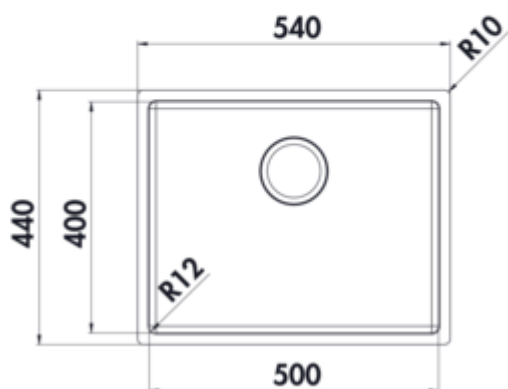


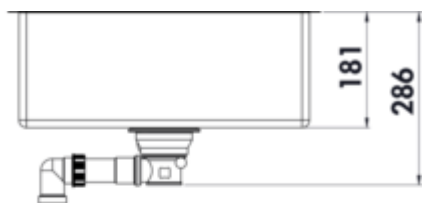

Corno Basso 4

Product number: 1013143

Configuration: stainless steel

Configuration options

1013143 | stainless steel

1041116 | set (set and Arco 1 faucet)

- ✓ Built-in sink
- ✓ Flush mounted sink
- ✓ Sub-structure bowl

Built-in/sub-structure sink. Single bowl. 3½" drain and spill-over fitting. When using the mounting brackets supplied, the installation width required increases by approx. 30 mm per side in case of the sub-structure sink.

Flat edge: also suitable for flush installation

— cut-out dimensions ca. 530 x 430 mm (built-in sink)

— cut-out dimensions ca. 500 x 400 mm (substructure sink)



[more infos...](#)

Technical data


Article type	Sink	Main sink width	500 mm
Height	286 mm	Height main sink	181 mm
Width	540 mm	Depth main sink	400 mm
Material	stainless steel	Flushing radius (R)	10
Note	when using the mounting brackets supplied, the installation width required increases by approx. 30 mm per side in case of the sub-structure sink	Maximum worktop material thickness	40 mm
Cabinet width	600 mm	Material thickness worktop minimum	10 mm
Cut-out dimension	approx. 530 x 430 mm (built-in sink) approx. 500 x 400 mm (substructure sink)	Armature bench	No
Worktop thickness	The sinks are suitable for worktop thicknesses from 10–40 mm (built-in sink) and from 20 mm (sub-structure sink)	Number of sinks	1 main sink
Excenter fitting	Drain and spill-over fitting	Number of overflow points	1
Valve type	3½" basket strainer valve flush	Sound insulation	Yes
Overflow	Overflow in the main basin	Pelvic inner radius (R)	12
Installation variant	Built-in sink Flush mounted sink Sub-structure bowl		

Spare Parts

1013057	Rotational knob excenter fitting, Drain fittings, stainless steel, for Corno Turno 50/60
1010046	Drain and spillover valve, Accessory, 3½", for Corno Basso

Recommendations

5011250	Arco 1, Sink faucet, chrome, high pressure
---------	--

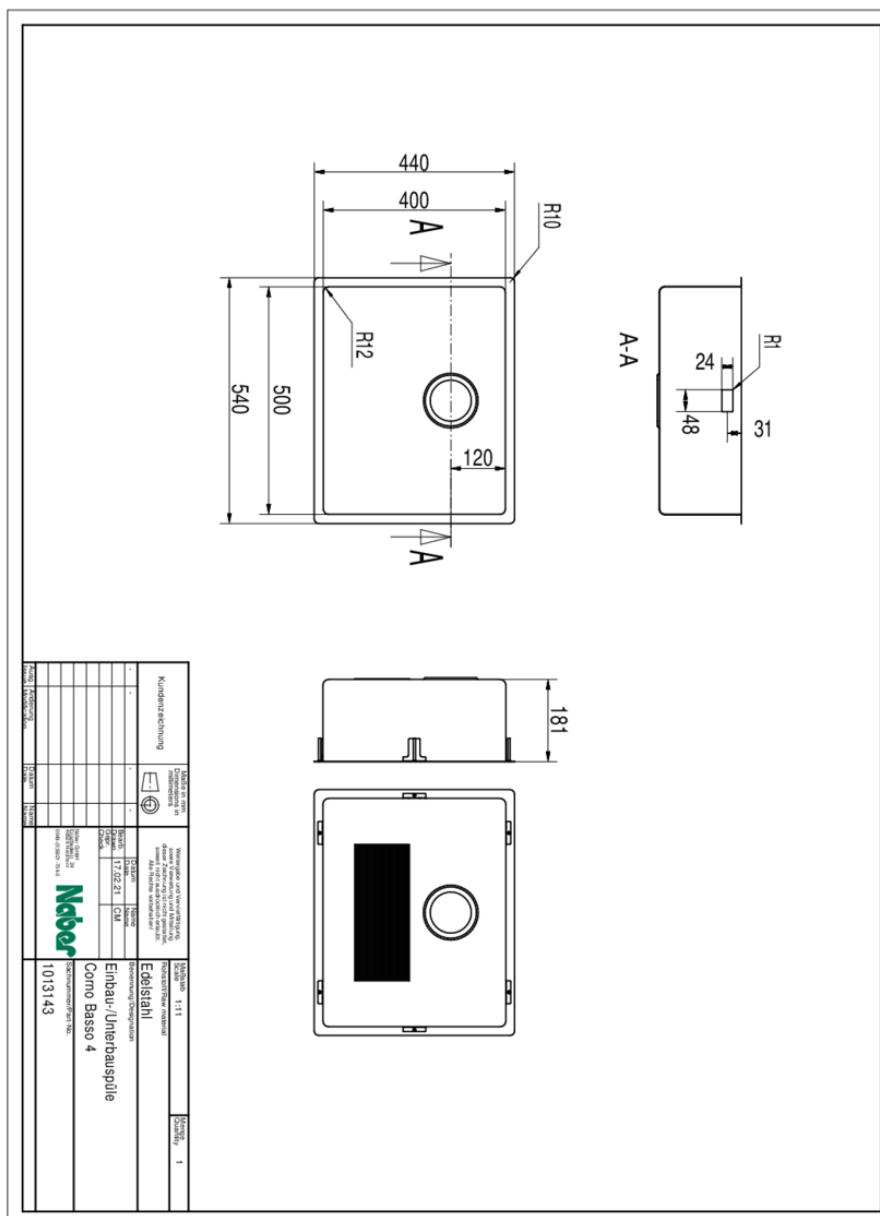

Flat-mounted installation
 built-in fitting hole:
 530x430 R10 mm
 cabinet 600 mm

Undermounted installation
 underport fitting hole:
 500x400 R12 mm
 n°6 holes ø 10 mm depth 15 mm
 cabinet 800 mm

Flush installation
 built-in fitting hole:
 530x430 R10 mm
 fitting lower edge:
 542x421,5 R11 mm
 cabinet 600 mm

DETTAGLIO SCALA 1 : 2