

Edition colour change LED 2

Product number: 7062532

Configuration: L 1500 mm, 20 W, stainless steel coloured, incl. 6 clips



Configuration options

7062532 | L 1500 mm, 20 W, stainless steel coloured, incl. 6 clips

7062533 | L 1500 mm, 20 W, black matt, incl. 6 clips

7062534 | L 2600 mm, 34 W, stainless steel coloured, incl. 9 clips


7062535 | L 2600 mm, 34 W, black matt, incl. 9 clips

✓ Under-cabinet/niche light

✓ linear light

✓ 2200 K warm white to 6500 K cold white

Lamp for mounting from below. Anodised aluminium housing with plastic covers. Innovative lighting technology with a PMMA lens. Easy snap-in installation.

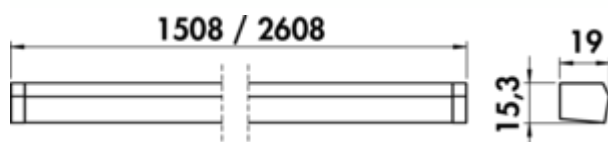

Individual lamp without switch

- 24 V
- stepless control of the light colour from **2200 K** warm white to **6500 K** cold white
- max. 140 lumen/watt
- very high quality of light thanks to colour rendering index > 90
- dimming function: brightness continuously dimmable
- 2000 mm supply cable on both sides
- incl. 4 end caps
- replaceable LED strip module
- **can be individually customised on site (cut to size)**
- LIC 2.0/MEC LED system compatible

This product contains a light source of energy efficiency class E.



[more infos...](#)

Technical data

Article type	Luminaire	Colour temperature	2200 K warm white to 6500 K cold white
Height	15,3 mm	Colour temperature adjustable	stepless
Width	1.500 mm	Type of dimming	brightness continuously dimmable
Energy efficiency class	E	LIC system compatible	Yes
Mounting/Fixing	Base unit installation (wall unit/shelf)	Illuminant type	LED
Material housing	aluminium	Colour rendering index	>90
Certification	CE	Replaceable illuminant	Yes
Shortenability	may be shortened	Light yield	140 lumen/watt
Shape	angular	Touch function	Yes
Length of the supply line (primary)	2.000 mm	Design	Under-cabinet/niche light linear light
Illuminant included	Yes	Dimming function (composite)	Yes, brightness continuously dimmable
Dimmer	Yes	Illuminant power	20 watts