

## Edition colour change LED 2

Product number: 7062532

Configuration: L 1500 mm, 20 W, stainless steel coloured, incl. 6 clips



### Configuration options

7062532 | L 1500 mm, 20 W, stainless steel coloured, incl. 6 clips

7062533 | L 1500 mm, 20 W, black matt, incl. 6 clips

7062534 | L 2600 mm, 34 W, stainless steel coloured, incl. 9 clips


7062535 | L 2600 mm, 34 W, black matt, incl. 9 clips

✓ Under-cabinet/niche light

✓ linear light

✓ 2200 K warm white to 6500 K cold white

Lamp for mounting from below. Anodised aluminium housing with plastic covers. Innovative lighting technology with a PMMA lens. Easy snap-in installation.

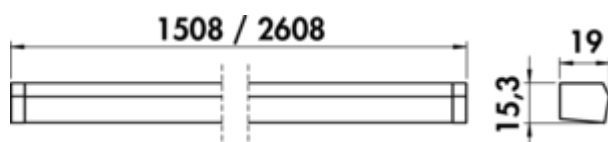

### Individual lamp without switch

- 24 V
- stepless control of the light colour from **2200 K** warm white to **6500 K** cold white
- max. 140 lumen/watt
- very high quality of light thanks to colour rendering index > 90
- dimming function: brightness continuously dimmable
- 2000 mm supply cable on both sides
- incl. 4 end caps
- replaceable LED strip module
- **can be individually customised on site (cut to size)**
- LIC 2.0/MEC LED system compatible

**This product contains a light source of energy efficiency class E.**



[more infos...](#)

### Technical data

|                                     |                                          |                               |                                           |
|-------------------------------------|------------------------------------------|-------------------------------|-------------------------------------------|
| Article type                        | Luminaire                                | Colour temperature            | 2200 K warm white to 6500 K cold white    |
| Height                              | 15,3 mm                                  | Colour temperature adjustable | stepless                                  |
| Width                               | 1.500 mm                                 | Type of dimming               | brightness continuously dimmable          |
| Energy efficiency class             | E                                        | LIC system compatible         | Yes                                       |
| Mounting/Fixing                     | Base unit installation (wall unit/shelf) | Illuminant type               | LED                                       |
| Material housing                    | aluminium                                | Colour rendering index        | >90                                       |
| Certification                       | CE                                       | Replaceable illuminant        | Yes                                       |
| Shortenability                      | may be shortened                         | Light yield                   | 140 lumen/watt                            |
| Shape                               | angular                                  | Touch function                | Yes                                       |
| Length of the supply line (primary) | 2.000 mm                                 | Design                        | Under-cabinet/niche light<br>linear light |
| Illuminant included                 | Yes                                      | Dimming function (composite)  | Yes, brightness continuously dimmable     |
| Dimmer                              | Yes                                      | Illuminant power              | 20 watts                                  |