

Manubrio colour change LED

Product number: 7061298

Configuration: single lamp, L 1500 mm, stainless steel coloured

Configuration options

7060107 | single lamp, L 2600 mm, black matt

7060108 | single lamp, L 1500 mm, black matt

7061197 | single lamp, L 2600 mm, stainless steel coloured

7061298 | single lamp, L 1500 mm, stainless steel coloured

✓ LED Stripe

✓ Base light/niche light

✓ Handle strip lighting

Handle strip lighting. Plastic body, self-adhesive LED strip, can be shortened every 50 mm, no visible LED incl. holding clamps for handle strips.

Individual lamp

— 7.8 watts per meter, 12 V

— continuous control of the light colour from **2700 K** warm white to **6500 K** cold white

— max. 80 lumen/watt at **6500 K** cold white

— 2000 mm two-sided supply line


— LED strip, two-sided feed-in

— incl. 4 end caps

— LIC/MEC LED system compatible

This product contains a light source of energy efficiency class F.

More information about the LIC/MEC LED system

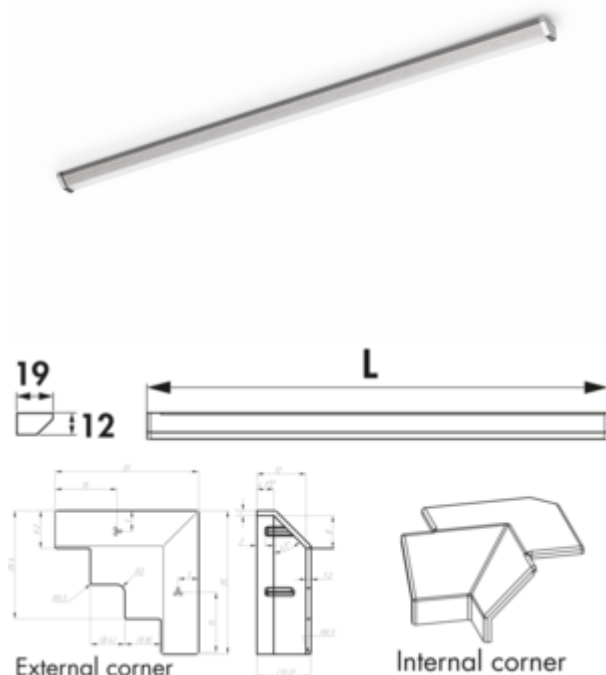

Technical data

Article type	LED stripe	Illuminant included	Yes
Height	12 mm	Housing colour	stainless-steel coloured
Width	1.500 mm	Colour temperature	2700 K warm white to 6500 K cold white
Energy efficiency class	F	Colour temperature adjustable	stepless
Transformer / converter required	Yes, must be ordered separately	LIC system compatible	Yes
Mounting/Fixing	self-adhesive	Illuminant type	LED
Material housing	plastic	Replaceable illuminant	No
Certification	CE F-sign MM sign	Light yield	max. 80 lumen/watt at 6000 K cold white
Shortenability	may be shortened every 50 mm	Connection	On both sides
Shape	straight	Homogeneous light field without visible LED points	Yes
Length of the supply line (primary)	2.000 mm	Design	LED Stripe Base light/niche light Handle strip lighting
More parts	incl. holding clamps incl. 4 end caps	Power per metre	7.8 watts

[more infos...](#)