

## Mira BS1

Product number: 7053044

Configuration: stainless steel



### Configuration options

7053044 | stainless steel

7053115 | black matt

✓ Built-in socket element

✓ 2 x earthen plug socket

✓ angular


Socket element. 2-fold. With hinged lid.

Due to its low installation depth, the Mira BS1 is particularly suitable for integration in cabinet covers.

— 230 V/16 A

— 85 x 145 x at least 36 mm (H x W x D)

— 2000 mm mains connection line, earthing contact plug enclosed loosely

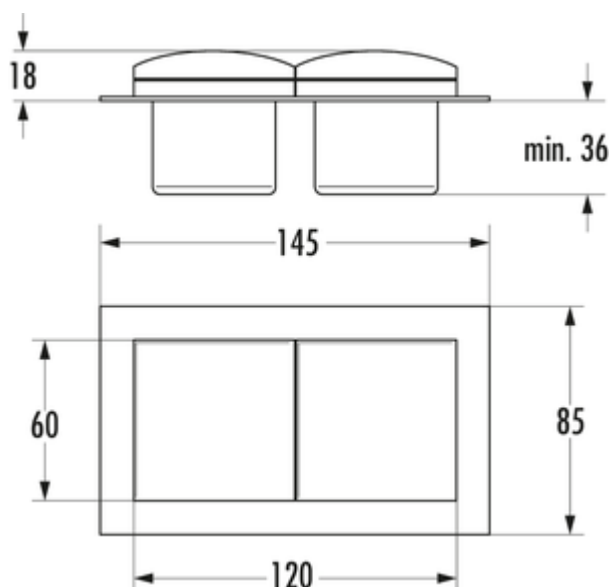

[more infos...](#)

### Technical data

|                                     |                           |                                        |                                      |
|-------------------------------------|---------------------------|----------------------------------------|--------------------------------------|
| Article type                        | Socket element            | Installation depth                     | 36 mm                                |
| Height                              | 85 mm                     | Version sockets                        | 2 x earthen plug socket              |
| Width                               | 145 mm                    | Housing colour                         | Stainless steel                      |
| Mains voltage                       | 240 V/16 A                | Mains plug loosely enclosed            | Yes                                  |
| Cable outlet                        | cable outlet back         | Colour socket                          | black                                |
| Properties                          | rust-free                 | Cover/blind type                       | flip lid                             |
| Mounting/Fixing                     | Wall mounting front panel | Type of socket element                 | Built-in socket element              |
| Certification                       | CE                        | Number of sockets (total)              | 2                                    |
| Shape                               | angular                   | Touch protection ("child safety lock") | without increased contact protection |
| Length of the supply line (primary) | 2.000 mm                  |                                        |                                      |