


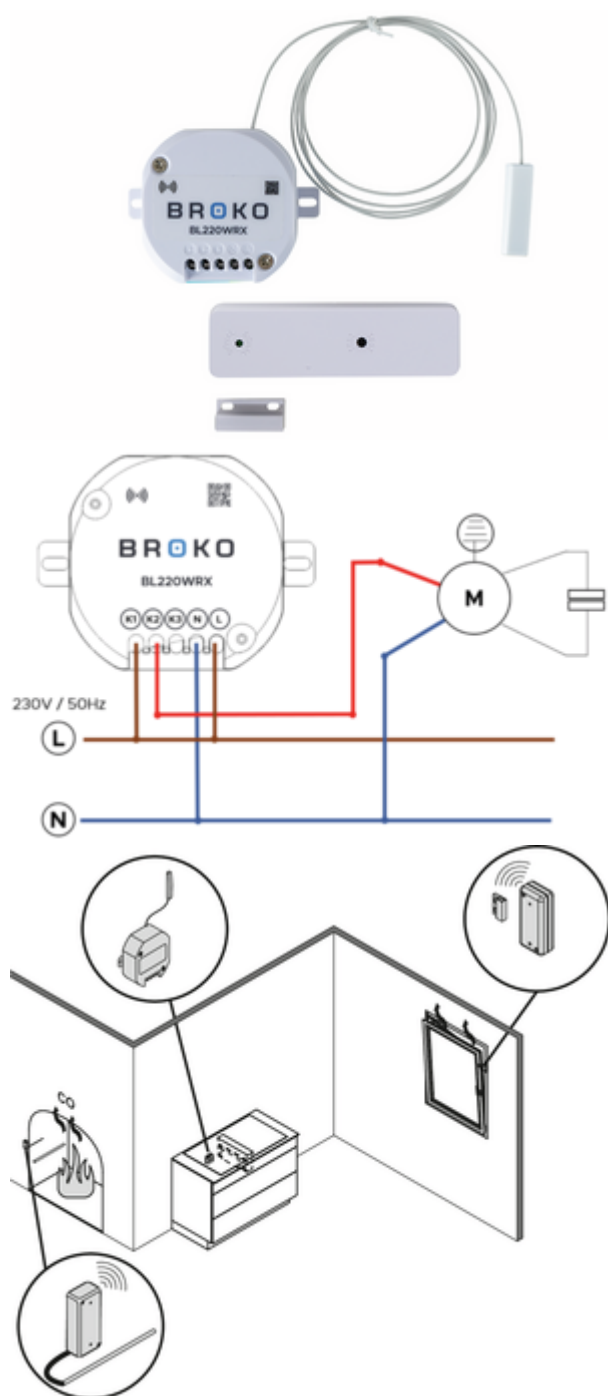

Window contact switch for hob extractors

Product number: 7051012

Configuration: with external antenna, white

Configuration options

7051012 | with external antenna, white

- ✓ Window contact switch
- ✓ installation in extractor hood (motor cable)

Safety switch **with wireless radio transmission for cooker hoods** with a fixed wired power connection (without a factory-fitted Schuko plug), such as hob extractors, down-draft ventilation or island hoods. Equipped with an external antenna for use even in difficult reception conditions, such as when mounted behind a metal or stainless steel panel. Installation in the extractor system is carried out via the power supply line (phase conductor), via a potential-free switch contact (if factory-fitted), or via the phase conductor of the fan motor (only possible with an AC motor!). **ATTENTION:** this requires intervention in the electrical system of the extractor system! Please observe the warranty/guarantee conditions of the hood manufacturer. Complete system with transmitter and receiver, including mounting materials and batteries (long service life, low energy consumption). — switching capacity up to 1449 W (6.3 A) — radio link monitoring — battery monitoring — relay contact 5 A normally open (potential-free) — installation in extractor hood (motor supply line) — tested in accordance with EU Directives 2014/53/EU (RED), 2014/35/EU and 2014/30/EU — when installed in a conventional extractor hood, the lighting can be switched on even when the fan motor is off. **Note on use in combination with BLDC motors:** Some extractor hoods, downdraft extractors and ventilation systems are equipped with what is known as a BLDC motor. When using the third phase (phases one and two are used for the hob), this can be switched separately. A suitable connection is often already provided by the appliance industry – and can be used for the wireless radio switch. For conventional single-phase AC motors, we recommend 7051001. **Please refer to the installation instructions at www.naber.com!**



[more infos...](#)

Technical data

Article type	Window contact switch	Further	radio range monitoring battery monitoring relay contact 5 A N/O contact (potential-free)
Power	switching capacity up to 1449 W (6.3 A)	Certification	TÜV
Mounting/Fixing	installation in extractor hood (motor cable)	Consisting of	Complete system with transmitter and receiver, including mounting material and batteries (long life, low energy consumption)
Note	Observe the guarantee/warranty conditions of the hood manufacturer Note on use in combination with a BLDC motor: cooker hoods with a BLDC motor can be switched separately when using the third phase Often, a connection is already provided and can be used for the window contact switch The installation in the exhaust system is carried out via the connection to the fan motor cable (motor cable). ATTENTION: for this it is necessary to intervene in the electrical system of the exhaust hood system ATTENTION: this requires intervention in the electrical system of the extractor system!		
		Ventilation system	Accessories