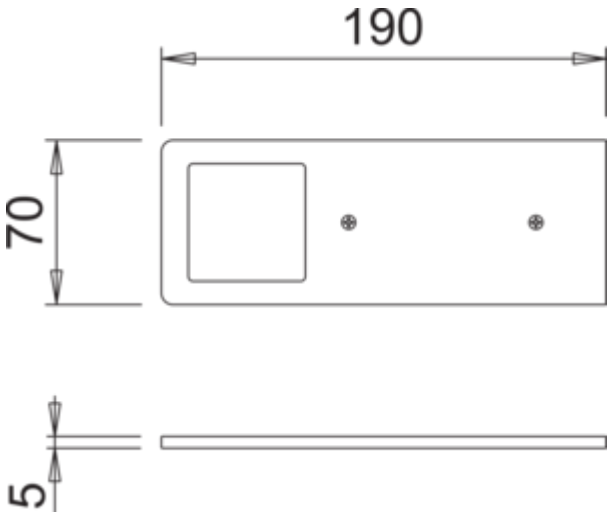


AstraLED SE white

Product number: 7063353
Configuration: individual lamp without switch, 3900 K neutral white

Configuration options

7063338 | individual lamp without switch, 3000 K warm white
7063339 | single lamp w. LED Touch s. d., 3000 K warm white
7063353 | individual lamp without switch, 3900 K neutral white
7063354 | single lamp w. LED Touch s. d., 3900 K neutral white
7063355 | set-2, 3900 K neutral white
7063356 | set-3, 3900 K neutral white
7063357 | set-5, 3900 K neutral white

✓ Under-cabinet/niche light
✓ 3900 K neutral white
✓ 5 watts

Lamp for mounting from below. Aluminium housing, 5 mm, illumination without visible LED points with integrated toch switch.

Individual lamp without or with LED Touch switch and dimmer (w. LED Touch s. d.)

— 5 watt, 24 V, two colour ranges: **3000 K** warm white, **3900 K** neutral white
— 65 lumen/watt
— brightness continuously dimmable using LED touch switch and dimmer
— 200 mm supply line, 2000 mm connecting line with mini-plug-in system
— additional memory function: the last setting is saved

Set 2, 3, 5 with LED Touch switch and dimmer consisting of:

— 1, 2 or 4 individual lamps with switch (7063338/7063353)
— 1 individual lamp with LED Touch switch and dimmer (7063339/7063354)
— 1 LED converter 2430 (7062250)
— may be extended to 6 lamps

This product contains a light source with the energy efficiency class F.

more infos...

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Technical data

Article type	Luminaire
Height	5 mm
Width	190 mm
Energy efficiency class	F
Transformer / converter required	Yes, must be ordered separately
Protection class	III
Mounting/Fixing	Base unit installation (wall unit/ shelf)
Material housing	aluminium
Length of connection cable (secondary)	2.000 mm
Certification	CE
Switch	No
Shape	angular
Memory function	Yes
Length of the supply line (primary)	150 mm

Illuminant included	Yes
Dimmer	Yes
Housing colour	white
Colour temperature	3900 K neutral white
Type of dimming	brightness continuously dimmable
Plug-in system	with mini plug-in system
Illuminant type	LED
Replaceable illuminant	No
Light yield	65 lumen/watt
Homogeneous light field without visible LED points	Yes
Touch function	Yes
Design	Under-cabinet/niche light
Dimming function (composite)	Yes, brightness continuously dimmable
Illuminant power	5 watts

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com