


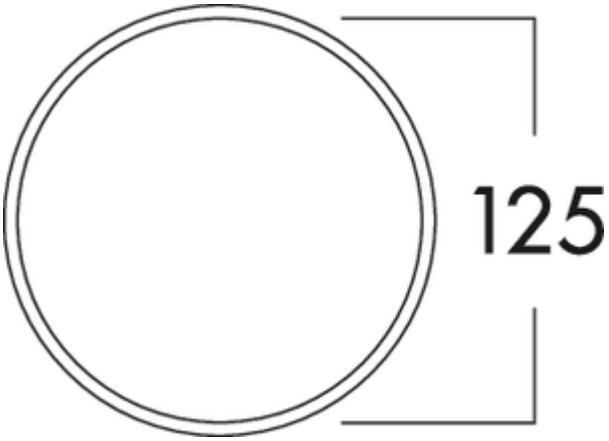


# K-Klima-R 125/125 wall conduct

Product number: 4021075
Configuration: brick red

**Configuration options**
4021073 | white
4021075 | brick red
4021077 | anthracite

✓ Wall sleeve
✓ installation in the wall
✓ Plug-in system for subsequent gluing

With backpressure shutter, telescopic pipe and external blind.
— hose/tube connector Ø 125 mm
— connector depth 24 mm
— installation depth 420–620 mm, can be shortened to 100 mm
— wall penetration Ø about 132 mm

more infos...

## Technical data

| | | | |
|---|---|---|---|
| Article type | Wall sleeve | Installation depth | 420–620 mm |
| Properties | can be shortened | Wall box version | backpressure shutter, telescopic pipe and external blind |
| Mounting/Fixing | installation in the wall<br>Plug-in system for subsequent gluing | Pipe socket dimension | hose/pipe connector Ø 125 mm |
| Shortenability | can be shortened to 100 mm | Blind version | with backpressure shutter |
| Shape | angular | System dimension | 125 |
| Support depth | 24 mm | Output drive | round |
| Connection diameter | 125 mm | Ventilation system | COMPAIR flow 125 |

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com