

KWC Ono 6 window fitting

Product number: 5022316

Configuration: stainless steel, high pressure

Configuration options

5022316 | stainless steel, high pressure



- ✓ Sink faucet
- ✓ high pressure
- ✓ Swivelling

Single lever faucet. With swivelling outlet and ceramic cartridge.

— height when tilted only 55 mm

— swivel range 270°

— drill Ø 35 mm

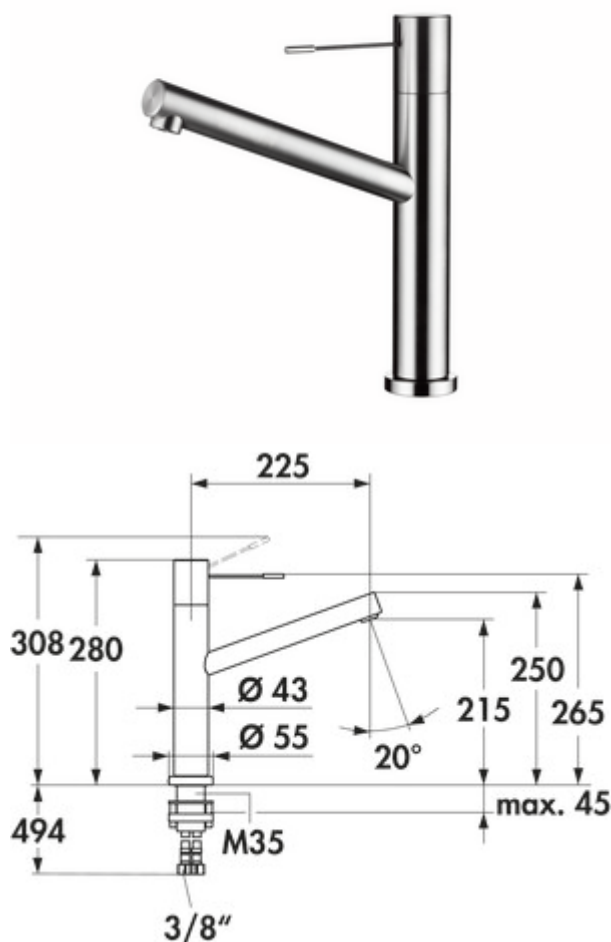

[more infos...](#)

Technical data


Article type	Sink faucet	Type of fitting	Single lever faucet
Brand	KWC	Operating pressure	high pressure
Number of handles	1	Width	55 mm
Total installation height	280 mm	Material	stainless steel
Outreach	225 mm	Backflow preventer	Yes
Outlet	Swivelling	Hose thread	3/8"
Discharge height	215 mm	Worktop thickness	45 mm
Operating mode	Lever	Window fitting	Yes
Drilling diameter	35 mm	Number of tap holes	1
Handle position	top	Spring-guided hose shower	No
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Height tilted	55 mm
Cartridge with ceramic sealing discs	Yes	Angle of inclination of aerator	20 °
Swivel range outlet	270°	Temperature adjustable	Yes
Factory customer service	Yes		

Accessories

5031005	Dirt Filter Ecco 1, 3/8", chrome
---------	----------------------------------

Dimensional sketch (PDF)

KWC ONO

KWC


KWC-Nr.	Oberfläche
10.151.043.700FL	edelstahl
A 225, flexible Anschlussschläuche, wegnehmbar	

Küche
wegnehmbar

- Hebelmischer
- Wegnehmbar für Unterfenstermontage - Einbaumaß 55 mm
 - Bedienungshebel aus Medizinalstahl
 - Eigensicher gegen Rückfließen
 - Schwenkauslauf 270°
 - Neoperl® Caché®
 - KWC Steuerpatrone M 35 H
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
 - Flexible Anschlussschläuche 3/8"
 - Befestigung mit Gewindestutzen M35 x 1.5 (Vormontagesockel)
 - Tischbohrung ø35 - 37 mm

Auslaufmenge 11 l/min (3 bar)
 Armaturengeräuschgruppe I

Sortiments-, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 04.01.2021