


Edition colour change LED 2

Product number: 7062535
Configuration: L 2600 mm, 34 W, black matt, incl. 9 clips

Configuration options
7062532 | L 1500 mm, 20 W, stainless steel coloured, incl. 6 clips
7062533 | L 1500 mm, 20 W, black matt, incl. 6 clips
7062534 | L 2600 mm, 34 W, stainless steel coloured, incl. 9 clips
7062535 | L 2600 mm, 34 W, black matt, incl. 9 clips

✓ Under-cabinet/niche light
✓ linear light
✓ 2200 K warm white to 6500 K cold white

Lamp for mounting from below. Anodised aluminium housing with plastic covers. Innovative lighting technology with a PMMA lens. Easy snap-in installation.

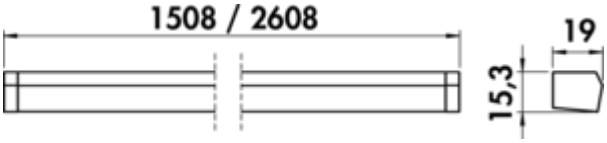

Individual lamp without switch
— 24 V
— stepless control of the light colour from **2200 K** warm white to **6500 K** cold white
— max. 140 lumen/watt
— very high quality of light thanks to colour rendering index > 90
— dimming function: brightness continuously dimmable
— 2000 mm supply cable on both sides
— incl. 4 end caps
— replaceable LED strip module
— can be individually customised on site (cut to size)
— LIC 2.0/MEC LED system compatible

This product contains a light source of energy efficiency class E.

CE

more infos...

Technical data

Article type	Luminaire
Height	15,3 mm
Width	2.600 mm
Energy efficiency class	E
Mounting/Fixing	Base unit installation (wall unit/shelf)
Material housing	aluminium
Certification	CE
Shortenability	may be shortened
Shape	angular
Length of the supply line (primary)	2.000 mm
Illuminant included	Yes
Dimmer	Yes

Colour temperature	2200 K warm white to 6500 K cold white
Colour temperature adjustable	stepless
Type of dimming	brightness continuously dimmable
LIC system compatible	Yes
Illuminant type	LED
Colour rendering index	>90
Replaceable illuminant	Yes
Light yield	140 lumen/watt
Touch function	Yes
Design	Under-cabinet/niche light linear light
Dimming function (composite)	Yes, brightness continuously dimmable
Illuminant power	34 watts