


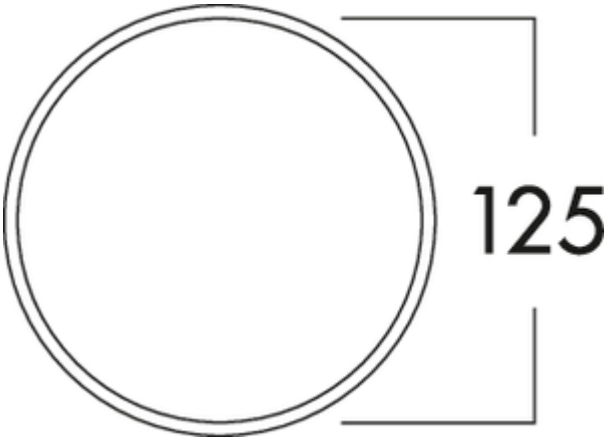

K-Klima-R 125/125 wall conduct

Product number: 4021073
Configuration: white

Configuration options
4021073 | white
4021075 | brick red
4021077 | anthracite

✓ Wall sleeve
✓ installation in the wall
✓ Plug-in system for subsequent gluing

With backpressure shutter, telescopic pipe and external blind.
— hose/tube connector Ø 125 mm
— connector depth 24 mm
— installation depth 420–620 mm, can be shortened to 100 mm
— wall penetration Ø about 132 mm

more infos...

Technical data

Article type	Wall sleeve	Installation depth	420–620 mm
Properties	can be shortened	Wall box version	backpressure shutter, telescopic pipe and external blind
Mounting/Fixing	installation in the wall Plug-in system for subsequent gluing	Pipe socket dimension	hose/pipe connector Ø 125 mm
Shortenability	can be shortened to 100 mm	Blind version	with backpressure shutter
Shape	angular	System dimension	125
Support depth	24 mm	Output drive	round
Connection diameter	125 mm	Ventilation system	COMPAIR flow 125

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com