
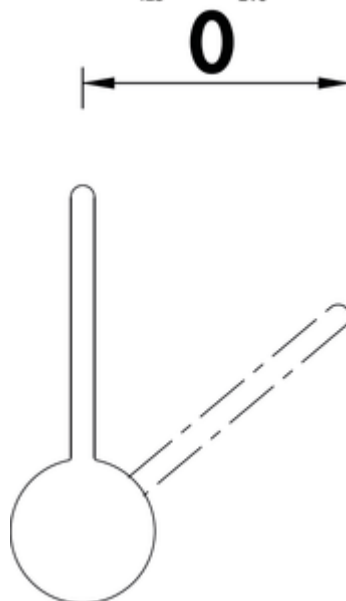



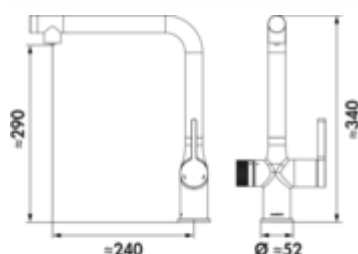

## LINEA Aqvella system

Product number: 5021345

Configuration: black matt, high pressure

### Configuration options

5021344 | stainless steel coloured, high pressure

5021345 | black matt, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ energy-saving cold start function

Sparkling water single lever mixer faucet including cooling and filter system. With swivelling outlet, side lever, laminar jet regulator and ceramic cartridge.

- set consisting of faucet and technical unit (matt black) with cooling system, filter, filter head and **standard** CO<sub>2</sub> cartridge. (425 g)
- technical unit: 455 x 210 x 425 mm (H x W x D)
- separate turning handle on the left for sparkling (classic + medium), chilled and filtered (still) water, control lever on the right for tap water
- integrated LED ring shows the different water modes with different colours.
- water temperature flexibly adjustable between 4 and 12°C
- energy-saving technology unit with low power consumption
- swivel range 360°
- drill Ø 35 mm
- corresponds to the German and European drinking water regulation/directive



[more infos...](#)

## Technical data

|                                      |              |                                             |                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------|--------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Article type                         | Sink faucet  | Type of fitting                             | Single lever faucet                                                                                                                                                                                                                                                                                                                   |
| Brand                                | LINEA        | Operating pressure                          | high pressure                                                                                                                                                                                                                                                                                                                         |
| Number of handles                    | 2            | Width                                       | 52 mm                                                                                                                                                                                                                                                                                                                                 |
| Total installation height            | 340 mm       | Further                                     | incl. cooling and filter system<br>Technical unit: 455 x 210 x 425 mm<br>(H x W x D)<br>separate rotary handle on the left<br>for carbonated (Classic + Medium),<br>chilled and filtered (Still) water<br>Control lever right for tap water<br>integrated LED ring indicates the<br>different water modes through<br>different colors |
| Height                               | 340 mm       | Temperature setting                         | Water temperature adjustable<br>between 4 - 12 °C                                                                                                                                                                                                                                                                                     |
| Outreach                             | 240 mm       | Consisting of                               | Set consisting of fitting and<br>technical unit (black matt) with<br>cooling system, filter, filter head,<br>and standard Co2 cartridge (425 g)                                                                                                                                                                                       |
| Discharge height                     | 290 mm       | Number of tap holes                         | 1                                                                                                                                                                                                                                                                                                                                     |
| Operating mode                       | Lever        | Hoses preassembled                          | Yes                                                                                                                                                                                                                                                                                                                                   |
| Drilling diameter                    | 35 mm        | Cartridge size                              | 35 mm                                                                                                                                                                                                                                                                                                                                 |
| Handle position                      | side lever   | ECO function                                | energy-saving cold start function                                                                                                                                                                                                                                                                                                     |
| Cartridge with ceramic sealing discs | Yes          | Minimum distance wall to centre tap<br>hole | 0 mm                                                                                                                                                                                                                                                                                                                                  |
| Swivel range outlet                  | 360°         | Connection hoses                            | 600 mm                                                                                                                                                                                                                                                                                                                                |
| Beam type                            | Laminar beam |                                             |                                                                                                                                                                                                                                                                                                                                       |