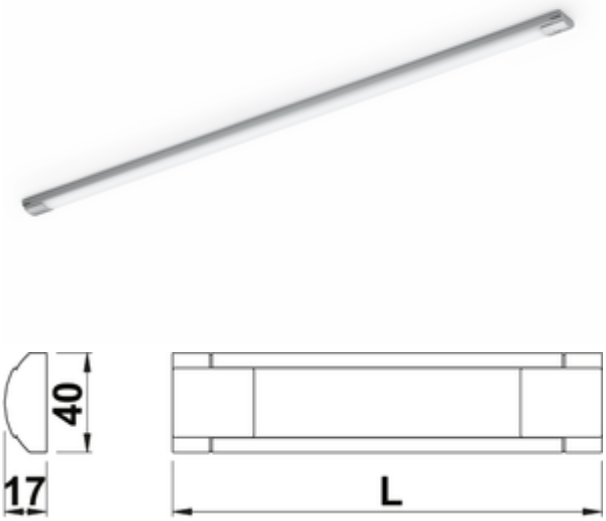


Feel LED

Product number: 7062283
Configuration: single lamp with switch, L 900 mm, 7.9 W

Configuration options

7062280 | single lamp with switch, L 450 mm, 3.6 W
7062281 | single lamp with switch, L 600 mm, 5 W
7062282 | single lamp with switch, L 800 mm, 7 W
7062283 | single lamp with switch, L 900 mm, 7.9 W
7062284 | single lamp with switch, L 1000 mm, 8.9 W
7062285 | single lamp with switch, L 1200 mm, 11 W
7062286 | subsequent lamp without switch, L 450 mm, 3.6 W
7062287 | subsequent lamp without switch, L 600 mm, 5 W
7062288 | subsequent lamp without switch, L 800 mm, 7 W
7062289 | subsequent lamp without switch, L 900 mm, 7.9 W
7062290 | subsequent lamp without switch, L 1000 mm, 8.9 W
7062291 | subsequent lamp without switch, L 1200 mm, 11 W

✓ linear light
✓ Under-cabinet/niche light
✓ 4300 K neutral white

Lamp mounted from below. Aluminium profile, **aluminium coloured**, 120 LEDs/m, no visible LED points.
The lights can easily be extended by simply plugging together the connecting cables integrated in the body caps.

Single lamp with switch
— touch switch and dimmer on the left or right
— **4300 K** neutral white
— 12 V
— 85 lumen/watt
— memory function: the last setting is stored
— dimmer function: brightness continuously dimmable
— 2000 mm supply line rear left or right

This product contains a light source of energy efficiency class G.

more infos...

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Technical data

Article type	Luminaire
Height	17 mm
Width	900 mm
Energy efficiency class	G
Transformer / converter required	Yes, must be ordered separately
Protection class	III
Mounting/Fixing	pluggable
Material housing	aluminium
Certification	CE
Switch	Yes
Shape	angular
Memory function	Yes
Length of the supply line (primary)	2.000 mm

Illuminant included	Yes
Dimmer	Yes
Colour temperature	4300 K neutral white
Type of dimming	brightness continuously dimmable
Illuminant type	LED
Replaceable illuminant	No
Light yield	85 lumen/watt
Connection	One-sided
Homogeneous light field without visible LED points	Yes
Touch function	Yes
Design	linear light Under-cabinet/niche light
Dimming function (composite)	Yes, brightness continuously dimmable
Illuminant power	7.9 watts

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com