


Kludi E-GO-L Sensor

Product number: 5023128

Configuration: chrome, with plug, high pressure

Configuration options

5023128 | chrome, with plug, high pressure

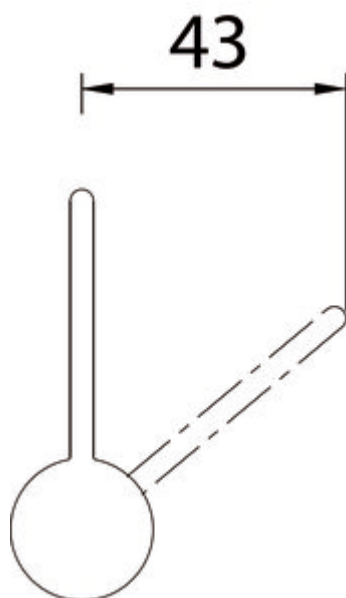

- ✓ Sink faucet
- ✓ high pressure
- ✓ with swivelling outlet

Single lever faucet. With swivelling outlet, laminar aerator and ceramic cartridge with hot-water limiter. Incl. built-in sensor for contactless operation and dirt strainer.

- can be operated either by sensor or manually
- water flow and temperature can be set as required
- water flow is activated by hand movement
- integrated cleaning mode for problem-free cleaning of the faucet
- adjustable sensor time for environmentally friendly and economical water consumption
- thanks to the controllable run-on time, not a drop is wasted
- swivel range 360°
- drill Ø 35 mm
- including DO-IT connection hoses



[more infos...](#)

Technical data

Article type	Sink faucet	Operating pressure	high pressure
Brand	Kludi	Width	210 mm
Number of handles	1	Mounting/Fixing	including DO-IT connection hoses
Total installation height	340 mm	Hose thread	3/8"
Outreach	195 mm	Worktop thickness	60 mm
Outlet	with swivelling outlet	Swivel range handle	43 °
Discharge height	315 mm	Number of tap holes	1
Operating mode	Sensor Lever	ECO function	Flow limiter Controllable overrun time Water saving function
Drilling diameter	35 mm	Temperature limiter/scald protection	hot-water limiter
Handle position	side lever	Minimum distance wall to centre tap hole	43 mm
Lever length	95 mm	Anti-limestone jet regulator	Yes
Cartridge with ceramic sealing discs	Yes	Temperature adjustable	Yes
Swivel range outlet	360°	With mains plug	Yes
Beam type	Laminar beam	Flow rate at 3 bar (cold)	10,5 l/min
Type of fitting	Single lever faucet		

