


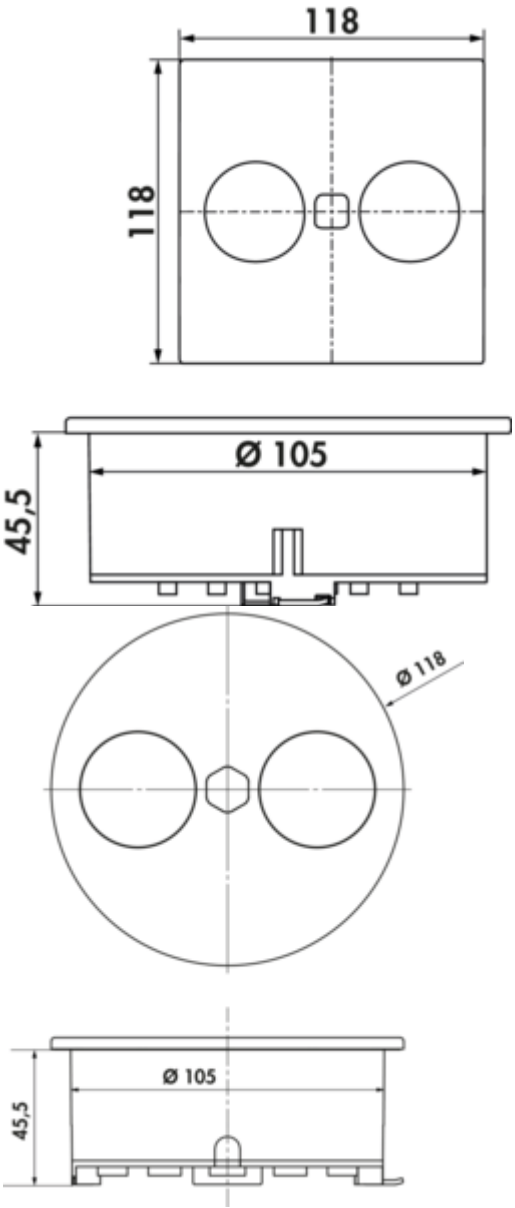

Duplex E double USB A+C

Product number: 7054006
Configuration: square, with earthed plug socket, black matt

Configuration options

7054002 | round, with earthed plug socket, stainless steel
7054004 | square, with earthed plug socket, stainless steel
7054006 | square, with earthed plug socket, black matt
7054007 | round, with earthed plug socket, black matt

✓ Built-in socket element
✓ 1 x earthed plug socket
✓ square

Socket element. Single and double USB A+C charger (charging station).
Electric opening at the push of a button.
— 1 x USB charger type A, 5 VDC, IA/I out: 1 x 2100 mA
— 1 x USB charger type C, 5 VDC, IA/I out: 1 x 3000 mA
— 3680 watt/16 A, 250 VAC, IP20
— H05VV-F 3G 1.5 mm2
— 3-pole with earthing contact
— 2000 mm mains connection line with earthed plug
— drill Ø 105 mm
— installation depth approx. 48 mm
— increased contact protection
— space-saving cable routing (downwards or side cable outlet)
— simple and quick installation
— retrofitting possible
— integrated water drain

more infos...

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Technical data

Article type	Socket element
Height	118 mm
Drilling diameter	105 mm
Width	118 mm
Mains voltage	250 VAC
Protection class	IP20
Cable outlet	cable outlet on the side or bottom
Max. connected load	3680 watt
Mounting/Fixing	on the worktop installation
Note	can be retrofitted
Further	3-pole with earthing contact
Certification	CE TÜV
Surface/coating	matt
Shape	square
Length of the supply line (primary)	2.000 mm
Installation depth	48 mm
Version sockets	1 x earthed plug socket

Mains plug loosely enclosed	Yes
Colour bezel	black matt
Colour socket	black
Cover/blind type	Electric
Integrated water drain	Yes
Number of USB ports	2
USB type	USB-A USB-C
Total charging current	3000 mA (USB-C)
Type of socket element	Built-in socket element
Switch type	Touch switch
Conductor cross-section	1,5 mm²
Rated current	16 A
Wiring	3-wire with free ends bared
Number of sockets (total)	1
Opening mechanism	Push-to-open
Touch protection ("child safety lock")	with increased contact protection
USB version	1 x USB charger type A, 5 VDC, IA/ I out: 2100 mA 1 x USB charger type C, 5 VDC, IA/ I out: 1 x 3000 mA

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com