

## Prova colour change LED

Product number: 7061207

Configuration: single lamp, L 2600 mm, stainless steel coloured

### Configuration options

7061207 | single lamp, L 2600 mm, stainless steel coloured

7061209 | single lamp, L 2600 mm, black matt

- ✓ Rear wall top light
- ✓ 2700 K warm white to 6500 K cold white
- ✓ straight


Top-mounted lamp for rear walls. Aluminium LED profile, can be shortened every 25 mm, no visible LED points.

### Individual lamp

- 31.2 watts, 12 V
- continuous control of the light colour from **2700 K** warm white to **6500 K** cold white
- max. 80 lumen/watt at **6500 K** cold white
- light length 2600 mm
- 2000 mm two-sided supply line
- LED strip 2600 mm, two-sided feed-in
- for 16 mm wall thickness
- LIC/MEC LED system compatible

This product contains a light source of energy efficiency class G.

More information about the LIC/MEC LED system

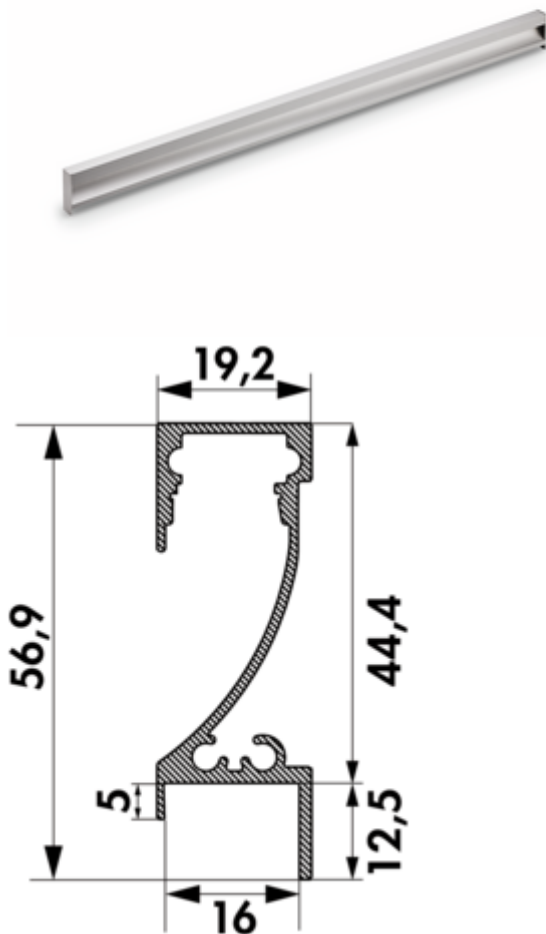

### Technical data

Article type	Luminaire	Illuminant included	Yes
Height	56,9 mm	Housing colour	stainless-steel coloured
Width	2.600 mm	Colour temperature	2700 K warm white to 6500 K cold white
Energy efficiency class	G	Colour temperature adjustable	stepless
Transformer / converter required	Yes, must be ordered separately	LIC system compatible	Yes
Protection class	III	Illuminant type	LED
Mounting/Fixing	attachable	Replaceable illuminant	No
Material housing	aluminium	Light yield	max. 80 lumen/watt at 6500 K cold white
Shortenability	may be shortened every 25 mm	Connection	On both sides
Shape	straight	Homogeneous light field without visible LED points	Yes
Length of the supply line (primary)	2.000 mm	Design	Rear wall top light
Suitable wall thickness	for 16 mm wall thickness	Illuminant power	31.2 watts

[more infos...](#)