


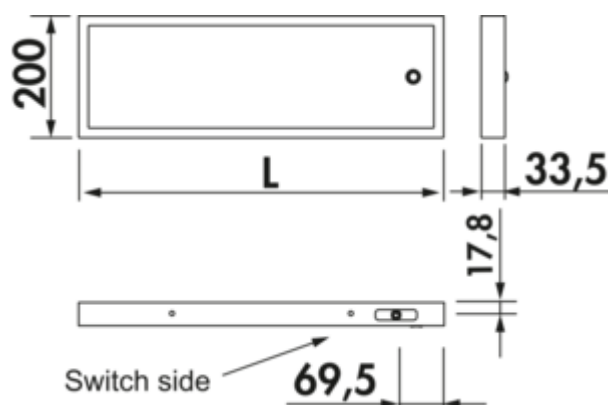

## Lista 30 LED

Product number: 7062195

Configuration: L 450 mm, 3.8 W, black matt

### Configuration options

7062065 | L 450 mm, 3.8 W, stainless steel coloured  
 7062066 | L 600 mm, 5.3 W, stainless steel  
 7062067 | L 900 mm, 8.2 W, stainless steel coloured  
 7062068 | L 1200 mm, 11 W, stainless steel coloured  
 7062195 | L 450 mm, 3.8 W, black matt  
 7062196 | L 600 mm, 5.3 W, black matt  
 7062197 | L 900 mm, 8.2 W, black  
 7062198 | L 1200 mm, 11 W, black matt

- ✓ lit glass pane
- ✓ 4200 K neutral white
- ✓ angular

Lit glass shelf. Aluminium body, **stainless steel coloured** or **black matt**, mat safety glass, with LED lighting, uniform illumination over the entire width upward and downward, free-hanging attachment up to a shelf depth of 200 mm, screws mounted invisibly on the back.

### Lit glass shelf with switch

- 4200 K neutral white
- 83 lumen/watt
- switch integrated into the bottom of the glass shelf
- **converter integrated into lit glass shelf**
- 2000 mm mains connection line, flat Euro plug enclosed separately
- cable outlet rear right of lamp
- bearing capacity approx. 10 kg

This product contains a light source of energy efficiency class G.



[more infos...](#)

## Technical data

|                                     |                                               |                                                    |                      |
|-------------------------------------|-----------------------------------------------|----------------------------------------------------|----------------------|
| Article type                        | lit glass pane                                | Illuminant included                                | Yes                  |
| Height                              | 33,5 mm                                       | Housing colour                                     | black matt           |
| Width                               | 450 mm                                        | Colour temperature                                 | 4200 K neutral white |
| Energy efficiency class             | G                                             | Illuminant type                                    | LED                  |
| Transformer / converter required    | Yes, included and integrable                  | Replaceable illuminant                             | No                   |
| Plug type                           | Flat plug                                     | Light yield                                        | 83 lumen/watt        |
| Mounting/Fixing                     | Screw fastening<br>screwable<br>Wall mounting | Connection                                         | One-sided            |
| Material housing                    | aluminium                                     | Material cover                                     | safety glass         |
| Switch                              | Yes                                           | Cover colour                                       | glass (LSG matt)     |
| Surface/coating                     | matt                                          | Homogeneous light field without visible LED points | Yes                  |
| Shape                               | angular                                       | Design                                             | lit glass pane       |
| Length of the supply line (primary) | 2.000 mm                                      | Illuminant power                                   | 3.8 watts            |
| Carrying capacity                   | ca. 10 kg                                     |                                                    |                      |