


## Nova Plus colour change LED

Product number: 7061334

Configuration: single lamp without switch, LIC LED system compatible, stainless steel col.

### Configuration options

7061334 | single lamp without switch, LIC LED system compatible, stainless steel col.

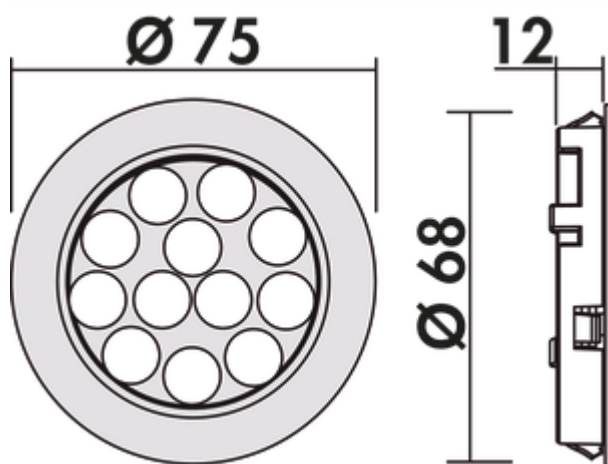

✓ Surface-mounted lamp

✓ Built-in lamp

✓ 2700 K warm white to 6500 K cold white

Surface mounted lamp, built-in lamp, ceiling light. Plastic body, round, with Power LEDs.

By removing the spacer ring, it can also be used as a built-in lamp.

Individual lamp without switch

- 3 watts, 12 V
- continuous control of the light colour from 2700 K warm white to 6500 K cold white
- memory function: the last setting is stored
- dimmer function: brightness continuously dimmable
- max. 87 lumen/watt at 6500 K cold white
- 2000 mm supply line with mini-plug-in system
- drill Ø 68 mm, installation depth 12 mm

Set 2, 3, 5 with colour change LED Touch switch and dimmer consisting of:

- 2, 3 or 5 individual lamps without switch (7061334)
- 1 colour change LED Touch switch and dimmer (7061131)
- 1 LED converter 12 (7061025)

This product contains a light source of energy efficiency class G.

Weitere Informationen zum LIC LED-System



[more infos...](#)

## Technical data

|                                     |   |                               |   |
|-------------------------------------|---|-------------------------------|---|
| Article type                        | Luminaire   | Illuminant included           | Yes                                     |
| Drilling diameter                   | 68 mm   | Dimmer                        | Yes                                     |
| Width                               | 75 mm   | Housing colour                | stainless-steel coloured                |
| Energy efficiency class             | G   | Colour temperature            | 2700 K warm white to 6500 K cold white  |
| Transformer / converter required    | Yes, must be ordered separately   | Colour temperature adjustable | stepless                                |
| Mounting/Fixing                     | Base unit installation (wall unit/shelf) installation<br>surface mounting<br>Ceiling mounting | Type of dimming               | brightness continuously dimmable        |
| Material housing                    | plastic   | LIC system compatible         | Yes                                     |
| Certification                       | CE<br>F-sign<br>MM sign   | Plug-in system                | with mini plug-in system                |
| Switch                              | No  | Illuminant type               | LED                                     |
| Shape                               | round   | Replaceable illuminant        | No                                      |
| Memory function                     | Yes   | Light yield                   | max. 87 lumen/watt at 6500 K cold white |
| Length of the supply line (primary) | 2.000 mm  | Design                        | Surface-mounted lamp<br>Built-in lamp   |
| Outer diameter                      | 75 mm   | Dimming function (composite)  | Yes, brightness continuously dimmable   |
| Installation depth                  | 12 mm   | Illuminant power              | 3 watts                                 |

## Accessories

|         |   |
|---------|---|
| 7061131 | Colour change LED Touch switch and dimmer, Switch, stainless steel coloured |
| 7061025 | LED converter 12, grey  |
| 7061049 | LED connection line, Connecting element, white, L 2000 mm                   |
| 7062250 | LED converter 2430, white   |
| 7061403 | MEC Driver LED converter, 60/72 W, 12/24 V                                  |
| 7061426 | MEC Driver LED 1-channel module radio/ZigBee, Accessory, 12 V               |
| 7061428 | MEC Driver LED 4-channel module radio/ZigBee, Accessory, 12 V               |
| 7061431 | MEC Driver LED remote control 1+4 channel ZigBee, white                     |