


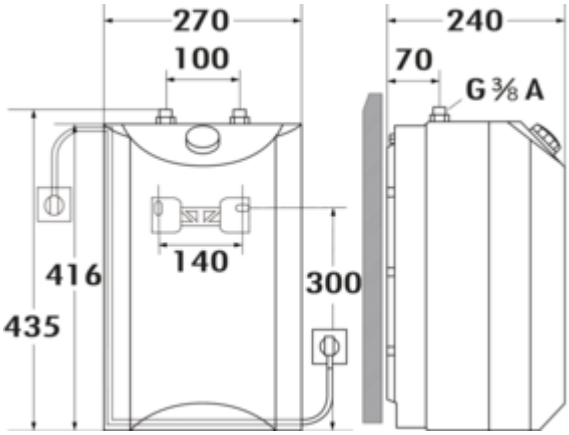

Undersink unit TR 3500

Product number: 6011043
Configuration: white

Configuration options
6011043 | white

✓ Hot water tank
✓ low pressure
✓ IP24D

Drip stop prevents dripping during heating, saves water and reduces lime scale. The pressure stop shows the calcification and recognises incorrect water connection from 0.25 MPa (2.5 bar).
— small water heater 5 litres, white. Open (pressure-free).
— with drip and pressure stop
— CLICKFIX assembly technology saves time and money
— container material in plastic with high-quality EPS expanded polystyrene insulation
— temperature continuously variable from approx. 35 °C to 85 °C with engaged positions at "*", "I" and "e" • frost protection setting
— power indicator lamp
— power-saving cover plate
— mixed water volume display on the power-saving cover plate
— the outlet of a faucet should always be free
— if possible, do not use a shower fitting
— high mixed water quantity 14 liters 40 °C hot water
— grounding contact easily accessible from the outside for the electrical safety testing according to BGV A3
— lowest standby power consumption of only 0.18 kWh/d
— secure metal water connections in brass, colour-coded
— switchable safety temperature limiter
— contact/moisture protection IP24D
— electricity supply 230 V, ready to plug in, connected load 2.2 kW
— weight with water 7.7 kg
— device dimensions (H x W x D) 435 x 270 x 240 mm

more infos...

Technical data

Article type	Hot water tank
Height	435 mm
Operating pressure	low pressure
Width	270 mm
Material	plastic
Energy efficiency class	A
Mains voltage	230 V
Protection class	IP24D
Protection class	I
Integrated display	power indicator lamp mixed water volume display on the power-saving cover plate
Mounting/Fixing	CLICKFIX assembly technology saves time and money
Note	the outlet of a faucet should always be free if possible, do not use a shower fitting ready to plug in, connected load 2.2 kW grounding contact easily accessible from the outside for the electrical safety testing according to BGV A3
Operating mode	Cable
Certification	CE VDE
Material connections	brass
Temperature setting	continuous temperature setting of 35–85 °C
Weight with water filling	16,975574 lb
Under-sink unit version	With drip and pressure stop With frost protection setting "*" switchable safety temperature limiter
Standby energy consumption	0,18 kWh/d
Mixed water quantity	40 °C 14 l
Volume/Content	5 l
Material container	plastic with high-quality EPS expanded polystyrene insulation

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

naber.com