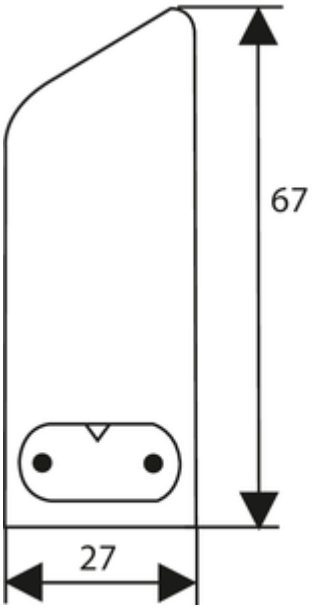

Giro-S LED

Product number: 7064184
Configuration: L 1210 mm, 21 W, silver coloured

Configuration options
7064180 | L 348 mm, 6 W, silver coloured
7064181 | L 576 mm, 10 W, silver coloured
7064182 | L 908 mm, 16 W, silver coloured
7064183 | L 770 mm, 13 W, silver coloured
7064184 | L 1210 mm, 21 W, silver coloured

✓ Under-cabinet/niche light
✓ linear light
✓ 4000 K neutral white

Lamp mounted from below. 150° swivelling LED lamp unit with acrylic cover**.** Illumination without visible LED points.

The lamps can easily be extended by simply plugging together or using the connection line supplied.

Individual lamp with switch
— 230 V **(high voltage), 4000 K** neutral white
— 75 lumen/watt
— 1800 mm mains connection line enclosed separately
— 300 mm connection line enclosed separately
— additional connector length 60 mm
— cable outlet left side of lamp
— **max. 10 lamps can be connected**
This product contains a light source of energy efficiency class C.

CE

more infos...

Technical data

Article type	Luminaire
Height	27 mm
Width	1.210 mm
Energy efficiency class	C
Transformer / converter required	No
Mounting/Fixing	pluggable
Note	max. 10 lamps can be connected
Length of connection cable (secondary)	300 mm
Switch	Yes
Shape	angular
Length of the supply line (primary)	1.800 mm

Illuminant included	Yes
Colour temperature	4000 K neutral white
Swivel range	150 °
Illuminant type	LED
Replaceable illuminant	No
Light yield	75 lumen/watt
Connection	One-sided
Material cover	Acrylic glass
Homogeneous light field without visible LED points	Yes
Design	Under-cabinet/niche light linear light
Illuminant power	21 watts