


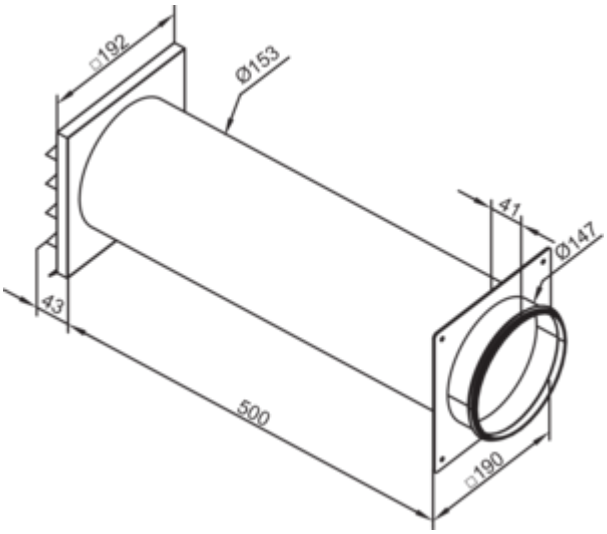

STEEL flow SF-Klima-E 150 wall conduct

Product number: 4061030
Configuration: galvanized steel, stainless steel

Configuration options
4061030 | galvanized steel, stainless steel

✓ Wall sleeve
✓ installation in the wall
✓ plug-in system

Stainless steel external blind with backflow trap.
— can be shortened
— installation depth 500 mm, can be shortened to 190 mm
— wall penetration Ø ca. 155 mm
— suitable for round pipes SR-R flex and SR-R
— connection to a plastic round pipe possible

more infos...

Technical data

Article type	Wall sleeve
Brand	STEEL flow
Width	500 mm
Material	galvanized steel
Properties	can be shortened
Mounting/Fixing	installation in the wall plug-in system
Note	connection to a plastic round pipe possible
Suitable for	suitable for round pipes SR-R flex and SR-R
Surface/coating	galvanised
Shortenability	can be shortened to 190 mm

Shape	angular
Outer diameter	150 mm
Diameter wall opening	155 mm
Connection diameter	148 mm
Installation depth	500 mm
Wall box version	stainless steel external blind with backflow trap
Blind version	with backpressure shutter
System dimension	150
Output drive	round
Ventilation system	COMPAIR STEEL flow® 150

Installation dimensions (PDF)

