

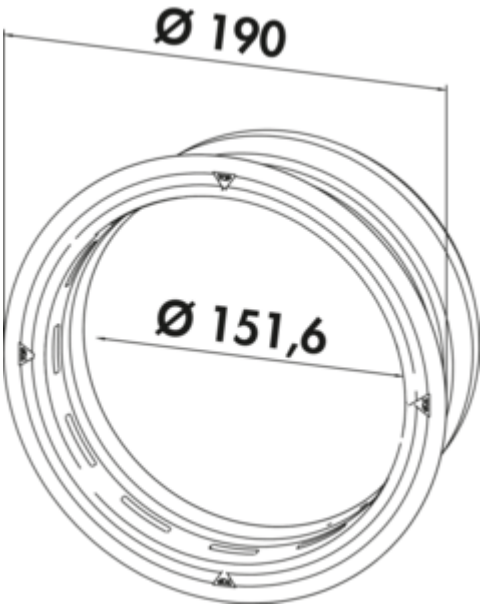

PRIME flow P-K-Klima-R 150 wall conduct

Product number: 4051074
Configuration: brick red

Configuration options
4051068 | white
4051070 | anthracite
4051074 | brick red
4051076 | light grey

✓ Wall sleeve
✓ plug-in system

Wall conduct, with backflow trap — N-Klick system for secure connection with the universal connector
— direct connection of the flat adapter, round pipe or round pipe bends
— max. wall thickness 550 mm, can be shortened to 220 mm
— core hole drilling in nominal Ø 162 or 164 mm
— wall sleeve for tool-free installation and sealing against leakage

more infos...

Technical data

Article type	Wall sleeve
Brand	PRIME flow
Material	plastic
Properties	can be shortened
Mounting/Fixing	plug-in system
Diameter	150 mm
Suitable for	direct connection of the flat adapter, round pipe or round pipe bends
Shortenability	can be shortened to 220 mm
Field of use & application	Outside

Outer diameter	190 mm
Inner diameter	151,6 mm
Connection diameter	150 mm
Suitable wall thickness	max. wall thickness 550 mm
Blind version	with backpressure shutter
System dimension	150
Ventilation system	COMPAIR PRIME flow®
Rohbauset	core hole drilling in nominal Ø 162 mm

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Dimensional sketch (PDF)

