


## Piccolino

Product number: 7053224

Configuration: cover copper coloured

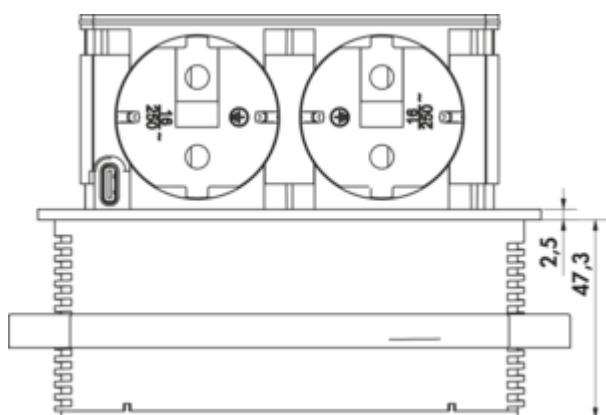

### Configuration options

- 7053210 | cover stainless steel
- 7053211 | cover black matt
- 7053223 | cover gunmetal
- 7053224 | cover copper coloured

✓ Retractable socket element

✓ 2 x earthed plug socket

✓ USB-C 30 W

Socket element. Retractable. With 2 earthed plug sockets, 1 USB Type-C charger, 30 watts. For installation in worktops.

- material plastic, black
- cover stainless steel or black matt
- 1 x USB charger type C, 5 VDC, IA/I out: 1100 mA
- 2000 mm mains connection line with Schuko plug
- drill Ø ca. 68 mm
- for panel thickness from 16 mm, mounted by screw ring
- cable outlet below



[more infos...](#)

### Technical data

|                                     |                             |                                        |                                                  |
|-------------------------------------|-----------------------------|----------------------------------------|--------------------------------------------------|
| Article type                        | Socket element              | Mains plug loosely enclosed            | Yes                                              |
| Height                              | 47,50 mm                    | Colour bezel                           | copper coloured                                  |
| Drilling diameter                   | 68 mm                       | Colour socket                          | black                                            |
| Width                               | 67,80 mm                    | Height extended                        | 48,5 mm                                          |
| Material                            | plastic                     | Number of USB ports                    | 1                                                |
| Mains voltage                       | 230 V/16 A                  | USB type                               | USB-C                                            |
| Protection class                    | IP44                        | Type of socket element                 | Retractable socket element                       |
| Cable outlet                        | cable outlet below          | Rated current                          | 16 A                                             |
| Mounting/Fixing                     | installation in the worktop | Number of sockets (total)              | 2                                                |
| Note                                | can be retrofitted          | Opening mechanism                      | Push-to-open                                     |
| Certification                       | CE                          | Touch protection ("child safety lock") | with increased contact protection                |
| Length of the supply line (primary) | 2.000 mm                    | Worktop thickness                      | from 16 mm                                       |
| Installation depth                  | 48 mm                       | USB version                            | 1 x USB charger type A, 5 VDC, IA/I out: 1000 mA |
| Version sockets                     | 2 x earthed plug socket     | smart charging                         | Yes                                              |
| Flush mountable                     | Yes                         |                                        |                                                  |