

E-Klima-E 150 wall conduct

Product number: 4022044
Configuration: stainless steel


Configuration options

4022044 | stainless steel

- ✓ Wall sleeve
- ✓ installation in the wall

Stainless steel pipe 500 mm long, 120 mm slider element and **stainless-steel external blind**, with backpressure shutter.

- hose/tube connector Ø 150 mm
- wall penetration Ø about 155 mm
- installation depth 500–600 mm, can be shortened to 175 mm

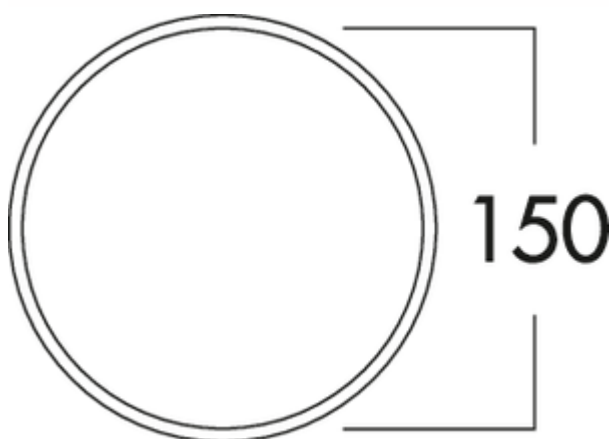

[more infos...](#)

Technical data

Article type	Wall sleeve	Diameter wall opening	155 mm
Height	201 mm	Connection diameter	150 mm
Width	500 mm	Installation depth	500–600 mm
Material	stainless steel	Wall box version	stainless steel pipe 500 mm long, 120 mm slider element and stainless-steel external blind, with backpressure shutter
Properties	can be shortened	Pipe socket dimension	hose/pipe connector Ø 150 mm
Mounting/Fixing	installation in the wall	System dimension	150
Certification	stainless	Output drive	round
Shortenability	can be shortened to 175 mm	Ventilation system	COMPAIR flow 150
Shape	angular		

Technical drawing of the V2A Compare Flow 150 outdoor air intake. The drawing includes three views: a top view showing a square frame with dimensions 201, 190, and 159; a side view showing a profile with a 146mm diameter and a 141mm height; and a perspective view of the air intake grille. The drawing is labeled with 'V2A' and 'Compare Flow 150'.