

Ideal Standard Ceraflex 1

Product number: 5024160
Configuration: chrome, high pressure


Configuration options
5024160 | chrome, high pressure
5024161 | chrome, low pressure

✓ Sink faucet
✓ high pressure
✓ with swivelling outlet

Single lever faucet. With swivelling outlet and ceramic cartridge.
— swivel range 360°
— drill Ø 35 mm

German Engineering

KERAMISCHE DICHTUNG

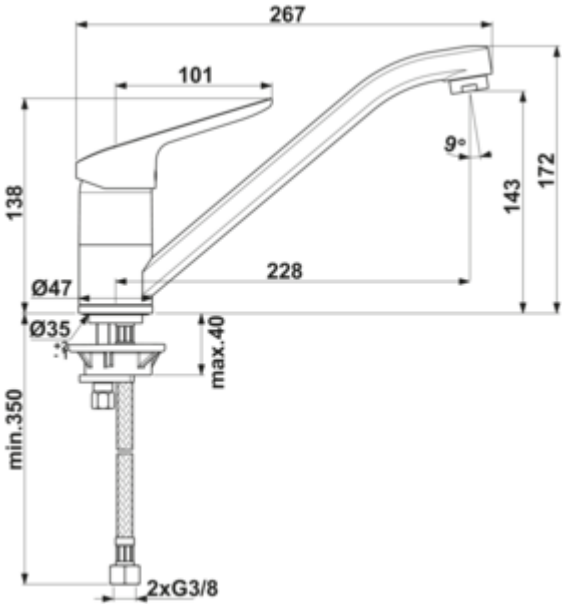

more infos...

Technical data

Article type	Sink faucet	Cartridge with ceramic sealing discs	Yes
Brand	Ideal Standard	Swivel range outlet	360°
Number of handles	1	Type of fitting	Single lever faucet
Total installation height	172 mm	Operating pressure	high pressure
Height	172 mm	Width	47 mm
Outreach	228 mm	Material	brass
Outlet	with swivelling outlet	Worktop thickness	40 mm
Discharge height	143 mm	Number of tap holes	1
Operating mode	Lever	Temperature limiter/scald protection	Yes
Drilling diameter	35 mm	Angle of inclination of aerator	9 °
Handle position	top	Flow rate at 3 bar (cold)	9 l/min
Lever length	101 mm		