

## SERVIZIO Namor® 4

Product number: 5025045

Configuration: gunmetal, high pressure

### Configuration options

5025007 | stainless steel, high pressure

5025008 | black matt, high pressure

5025045 | gunmetal, high pressure

5025143 | brushed-gold, high pressure

5025144 | rosé-gold, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ energy-saving cold start function


Single lever mixer. With **swivelling/pull-out** hose with shower head (can be switched to stream or shower), side lever, laminar aerator and ceramic cartridge.

— swivel range 120°

— drill Ø 35 mm

— shower hose: simple click fastening

— corresponds to the German and European drinking water regulation/directive

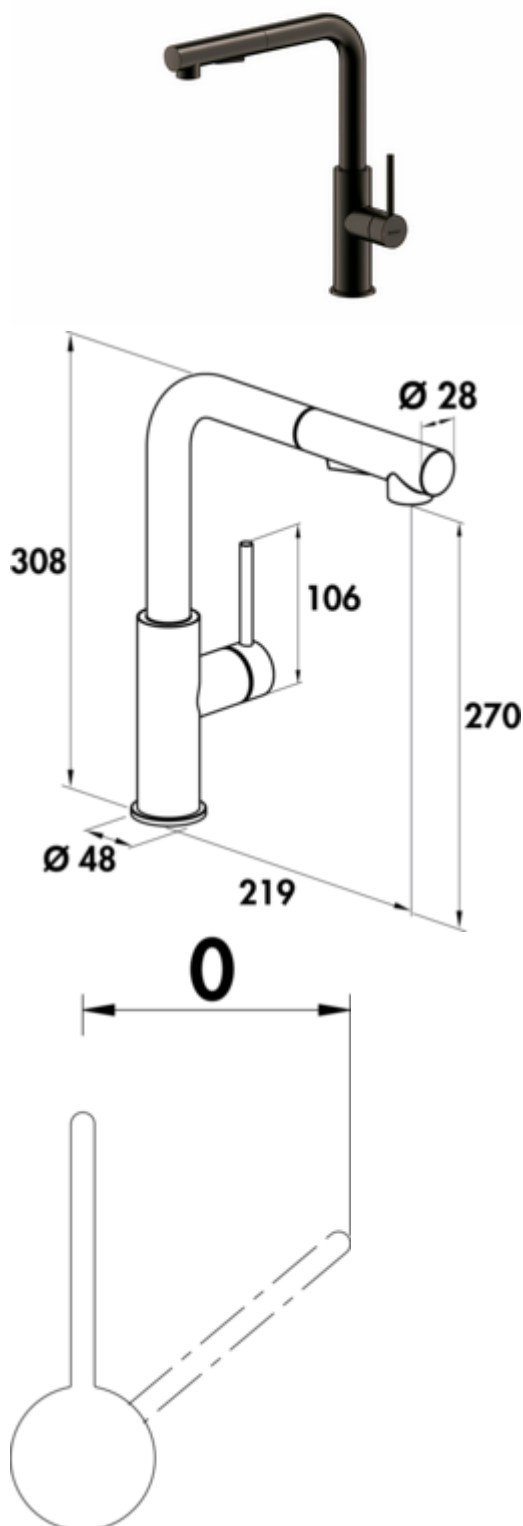

[more infos...](#)

## Technical data

|                                      |                     |                                 |                                                                                      |
|--------------------------------------|---------------------|---------------------------------|--------------------------------------------------------------------------------------|
| Article type                         | Sink faucet         | Material                        | stainless steel                                                                      |
| Brand                                | SERVIZIO            | Mounting/Fixing                 | showerhead hose: simple click attachment                                             |
| Number of handles                    | 1                   | Surface/coating                 | PVD coating                                                                          |
| Total installation height            | 308 mm              | ECO function                    | energy-saving cold start function                                                    |
| Height                               | 308 mm              | Convertible jet/shower          | Yes                                                                                  |
| Outreach                             | 219 mm              | Type of hose shower             | with swivelling/pull-out hose with shower head (can be switched to stream or shower) |
| Discharge height                     | 270 mm              | Max. Flow rate at 3 bar         | 6,88 l/min                                                                           |
| Operating mode                       | Lever               | Flow rate at 3 bar (cold)       | 6,12 l/min                                                                           |
| Drilling diameter                    | 35 mm               | Flow rate at 3 bar (hot)        | 6,08 l/min                                                                           |
| Handle position                      | side lever          | Flow rate at 3 bar (mix)        | 6,88 l/min                                                                           |
| Lever length                         | 106 mm              | Flow rate at 3 bar (spray cold) | 5,33 l/min                                                                           |
| Cartridge with ceramic sealing discs | Yes                 | Flow rate at 3 bar (spray hot)  | 5,4 l/min                                                                            |
| Swivel range outlet                  | 120°                | Flow rate at 3 bar (spray mix)  | 5,78 l/min                                                                           |
| Beam type                            | Laminar beam        | Size laminar flow regulator     | M16,5x1                                                                              |
| Type of fitting                      | Single lever faucet | Connection hoses                | 700 mm                                                                               |
| Operating pressure                   | high pressure       | Shower hose version             | simple click fastening                                                               |
| Width                                | 48 mm               |                                 |                                                                                      |

Dimensional sketch (PDF)

