



## Ideal Standard Cerafine O bathroom

Product number: 5024079

Configuration: chrome, high pressure

### Configuration options

5024071 | black matt, high pressure

5024079 | chrome, high pressure

✓ Washbasin tap

✓ high pressure


✓ Flow limiter

Single lever faucet. With pop-up rod waste fitting 1¼", ceramic cartridge and ECO function (with temperature control and 5 l aerator).

— drill Ø 35 mm

— EASY-FIX mounting system

German  
Engineering

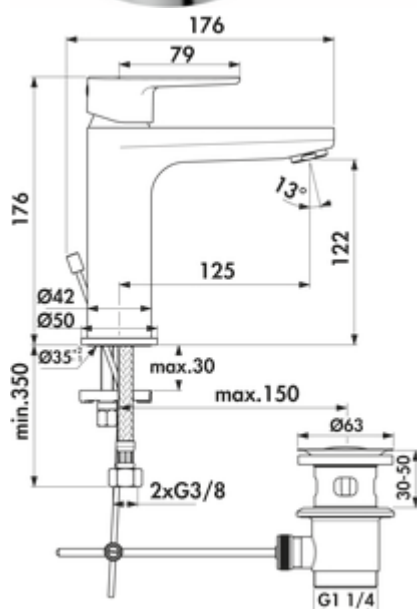

[more infos...](#)

## Technical data

|                                      |                                 |                                 |                                                                             |
|--------------------------------------|---------------------------------|---------------------------------|-----------------------------------------------------------------------------|
| Article type                         | Washbasin tap                   | Factory customer service        | Yes                                                                         |
| Brand                                | Ideal Standard                  | Type of fitting                 | Single lever faucet                                                         |
| Number of handles                    | 1                               | Operating pressure              | high pressure                                                               |
| Total installation height            | 176 mm                          | Width                           | 50 mm                                                                       |
| Outreach                             | 125 mm                          | Material                        | brass                                                                       |
| Discharge height                     | 122 mm                          | Hose thread                     | 3/8"                                                                        |
| Operating mode                       | Lever                           | Worktop thickness               | 30 mm                                                                       |
| Drilling diameter                    | 35 mm                           | Excenter fitting                | With pop-up rod waste fitting 1¼"                                           |
| Handle position                      | top                             | Number of tap holes             | 1                                                                           |
| Lever length                         | 79 mm                           | ECO function                    | Flow limiter<br>Water saving function<br>temperature control<br>5 l aerator |
| Manufacturer's warranty              | 5 years manufacturer's warranty | Angle of inclination of aerator | 13 °                                                                        |
| Cartridge with ceramic sealing discs | Yes                             | Max. Flow rate at 3 bar         | 5 l/min                                                                     |